


Insert-MC

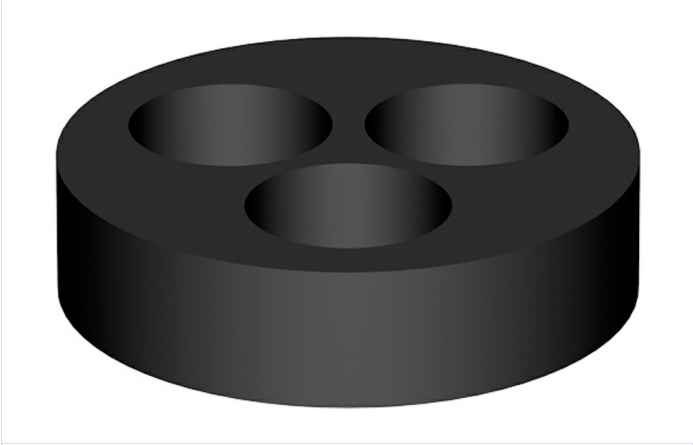

Description

Advantages

Applications

Solutions



Main technical characteristics

Colour	Black RAL 9005	DN	NW 3, NW 4, NW 5, NW 6, NW 7, NW 9, NW 8		PG 9, PG11, PG13, PG16, PG21, PG29		NBR		IP65
	-40 / 100 °C		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM	-				

Product data

DN				Ref	kg/u	
NW 3	PG 9	11	2	40030209	0.001	50
NW 4	PG11	14	2	40030211	0.001	50
NW 5	PG11	14	2	40030311	0.001	50
NW 6	PG13	16	2	40030313	0.001	50
NW 7	PG16	18	2	40030316	0.002	25
NW 9	PG21	22	2	40030321	0.003	25
NW 3	PG 9	11	3	40030409	0.001	50
NW 7	PG21	22	3	40030421	0.003	25
NW 9	PG29	30	4	40030429	0.006	5
NW 5	PG11	14	3	40030511	0.001	50
NW 5	PG13	16	3	40030513	0.001	50
NW 6	PG16	18	3	40030516	0.002	25
NW 8	PG21	22	3	40030521	0.003	25
NW 3	PG 9	11	4	40030609	0.001	50
NW 5	PG16	18	4	40030616	0.002	25
NW 7	PG21	22	4	40030621	0.003	25
NW 4	PG21	22	8	40030821	0.003	25
NW 3	PG29	30	16	40030829	0.008	5

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene

Insert-MC

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

