


Insert-P

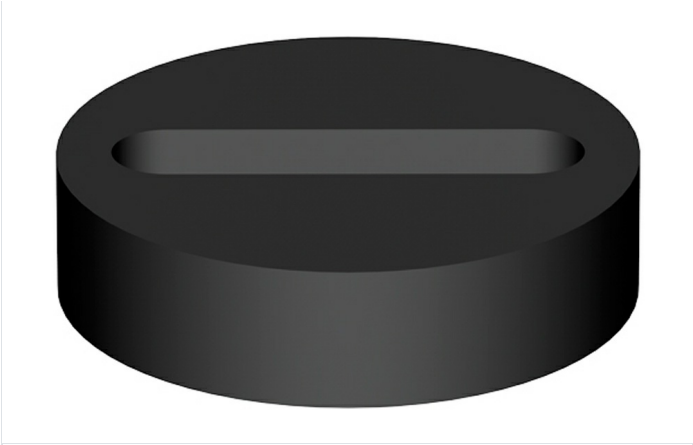

Description

Advantages

Applications

Solutions



Main technical characteristics

Colour	Black RAL 9005		7, 8, 10, 12, 14		13, 15, 22, 28, 33, 45		PG16, PG21, PG29, PG36, PG42, PG48		NBR		IP65
	-40 / 100 °C		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA		ETIM 10	EC000879					

Product data

				Ref	kg/u	
7	13	PG16	18	40030116	0,002	25
7	15	PG21	22	40030121	0,003	25
8	22	PG29	30	40030129	0,009	5
10	28	PG36	39	40030136	0,011	5
12	33	PG42	45	40030142	0,013	5
14	45	PG48	51	40030148	0,015	5

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic