




Description
Plug to make a fixation and a tighness of a flat cable 7 x 13 mm, manufactured on NBR rubber and black colour to include inside a cablegland.
Advantages
Applications
Solutions

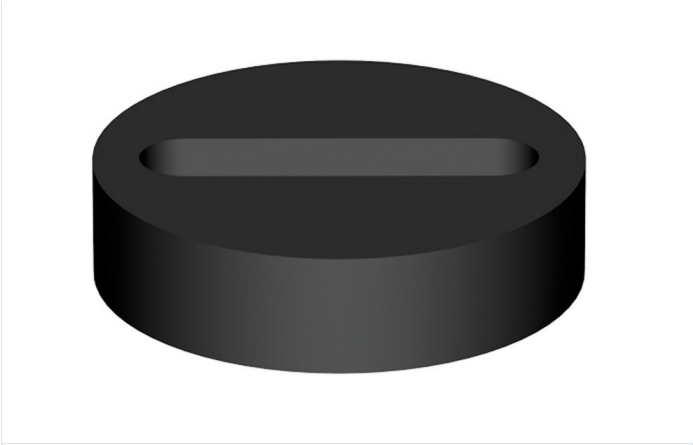

Product data

ETIM 10	EC000879	u	25
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	NBR
Colour	Black RAL 9005	IP	IP65
Flange (mm)	7	Working temperature range (°C)	-40 / 100 °C
Width (mm)	13	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
M/PG	PG16		
Ø d2 (mm)	18		
kg/u	0,002		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

