


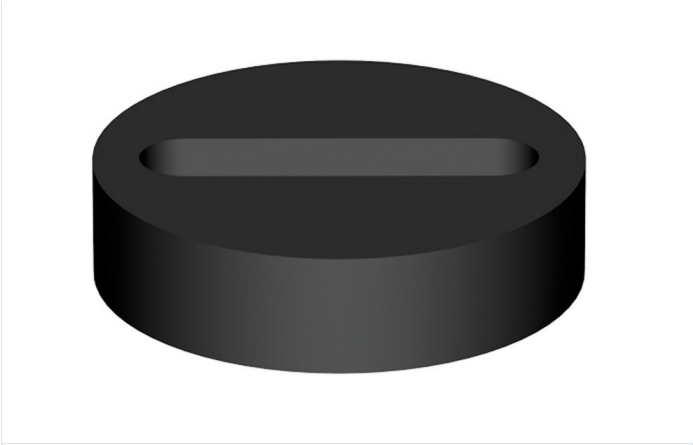

Description

Plug to make a fixation and a tighness of a flat cable 10 x 28 mm, manufactured on NBR rubber and black colour to include inside a cablegland.

Advantages

Applications

Solutions

Product data

ETIM 10	EC000879	u	5
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	NBR
Colour	Black RAL 9005	IP	IP65
Flange (mm)	10	Working temperature range (°C)	-40 / 100 °C
Width (mm)	28	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
M/PG	PG36		
Ø d2 (mm)	39		
kg/u	0,011		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

