


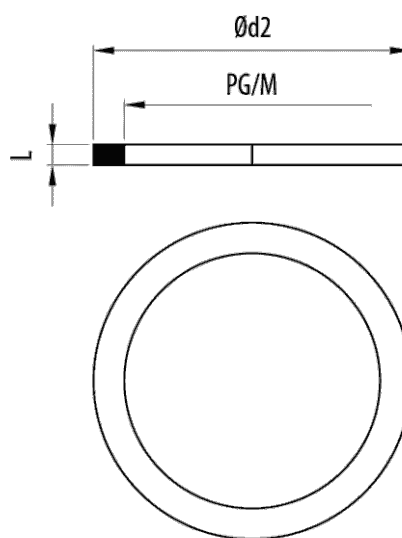

Description

Flat ring of NBR elastomer in blue colour, metric and PG thread for use with external threaded fittings and cable glands to provide an IP67 protection index to the joint. Available in various sizes.

Advantages

Manufactured in NBR elastomer in blue colour RAL 5024.

Protection index EN 60529: IP68.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for improving the tightness or the IP rating in the external thread of fittings for conduits or cable glands for the conduction or protection of wiring in general and industrial applications.

Solutions



Main technical characteristics				
Colour	Blue RAL 5024	PG	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63	Lmm 2
IP	IP68	°C	-25 / 120	Flame retardant
ETIM	EC000098			

Product data				
PG	Ø	Ref	kg/u	Q
PG 7	16.5	39090007	0.001	500
PG 9	19	39090009	0.001	500
PG11	22.5	39090011	0.002	500
PG13	25	39090013	0.003	500
PG16	27	39090016	0.003	500
PG21	33.5	39090021	0.005	500
PG29	43.5	39090029	0.009	250
PG36	55	39090036	0.018	100
PG48	69	39090048	0.025	50
M12	16	39090112	0.001	500
M16	20	39090116	0.001	500
M20	25	39090120	0.002	500
M25	31	39090125	0.003	500
M32	38	39090132	0.003	250
M40	48	39090140	0.005	100
M50	58	39090150	0.009	50
M63	72	39090163	0.018	50

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6

Flat Ring

- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

