

Flat Ring

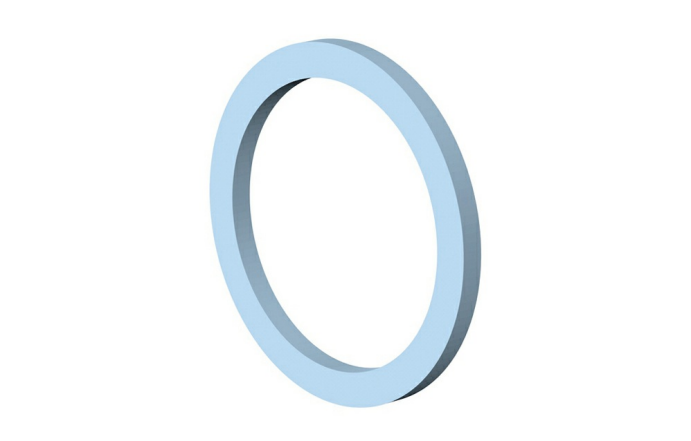

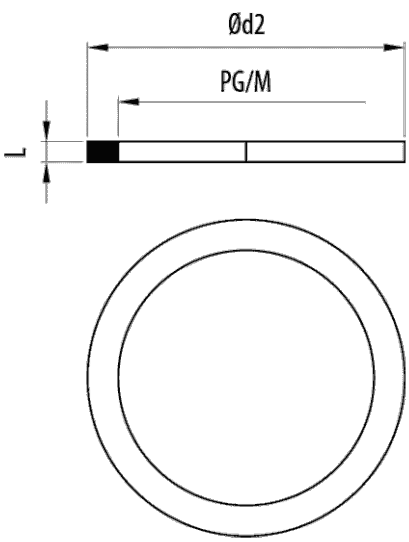

Description

Flat ring of NBR elastomer in blue colour, metric and PG thread for use with external threaded fittings and cable glands to provide an IP67 protection index to the joint. Available in various sizes.

Advantages

Manufactured in NBR elastomer in blue colour RAL 5024.

Protection index EN 60529: IP68.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for improving the tightness or the IP rating in the external thread of fittings for conduits or cable glands for the conduction or protection of wiring in general and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Flat Ring

Main technical characteristics

Colour Blue RAL 5024

PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63

L(mm) 2

NBR

IP68

-25 / 120 °C

Flame retardant

ETIM 10 EC001181

Product data

		Ref	kg/u	
PG 7	16.5	39090007	0,001	500
PG 9	19	39090009	0,001	500
PG11	22.5	39090011	0,002	500
PG13	25	39090013	0,003	500
PG16	27	39090016	0,003	500
PG21	33.5	39090021	0,005	500
PG29	43.5	39090029	0,009	250
PG36	55	39090036	0,018	100
PG48	69	39090048	0,025	50
M12	16	39090112	0,001	500
M16	20	39090116	0,001	500
M20	25	39090120	0,002	500
M25	31	39090125	0,003	500
M32	38	39090132	0,003	250
M40	48	39090140	0,005	100
M50	58	39090150	0,009	50
M63	72	39090163	0,018	50

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Flat Ring

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."