
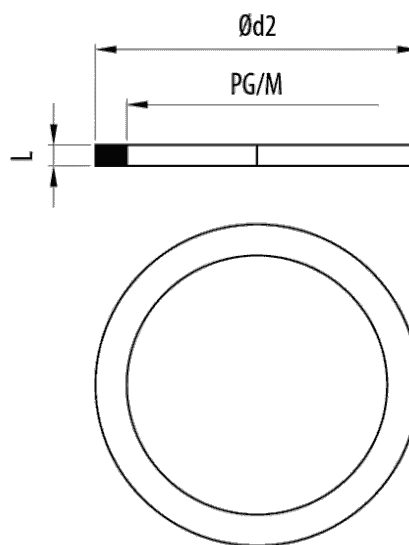


Flat Ring (Ref: 39090013)

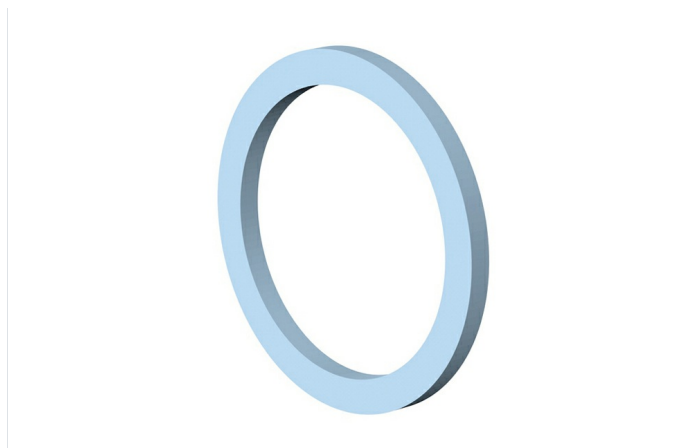

Description

Flat ring of NBR elastomer in blue colour, metric and PG thread for use with external threaded fittings and cable glands to provide an IP67 protection index to the joint. Available in various sizes.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in NBR elastomer in blue colour RAL 5024.

Protection index EN 60529: IP68.

Applications

Suitable for improving the tightness or the IP rating in the external thread of fittings for conduits or cable glands for the conduction or protection of wiring in general and industrial applications.

Solutions



Product data

ETIM 10	EC001181	u	500
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	NBR
Colour	Blue RAL 5024	IP	IP68
M/PG	PG13	Working temperature range (°C)	-25 / 120 °C
Ø d2 (mm)	25	Fire resistance	Flame retardant
L (mm)	2		
kg/u	0,003		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

