
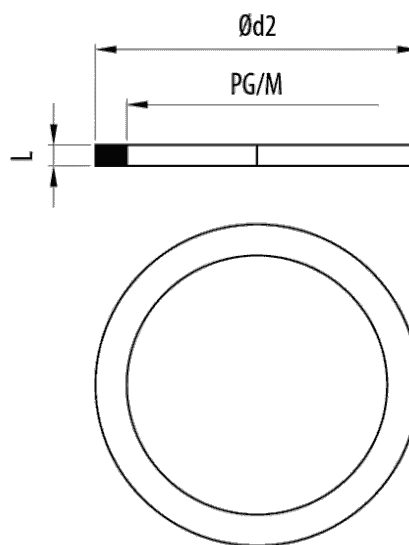


Flat Ring (Ref: 39090140)

1/2

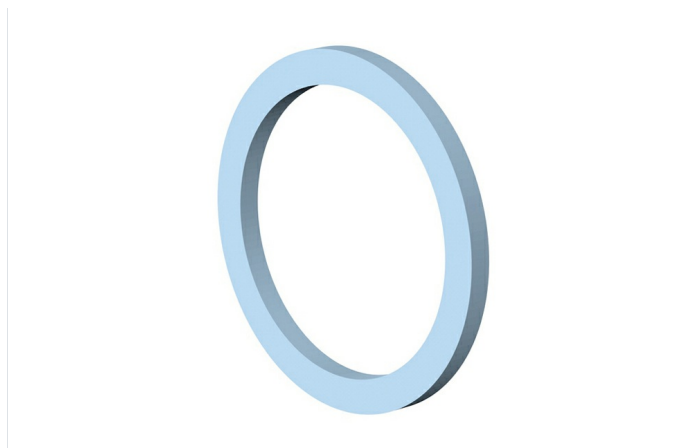

Description

Flat ring of NBR elastomer in blue colour, metric and PG thread for use with external threaded fittings and cable glands to provide an IP67 protection index to the joint. Available in various sizes.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in NBR elastomer in blue colour RAL 5024.

Protection index EN 60529: IP68.

Applications

Suitable for improving the tightness or the IP rating in the external thread of fittings for conduits or cable glands for the conduction or protection of wiring in general and industrial applications.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Flat Ring (Ref: 39090140)

Product data			
ETIM 10		EC001181	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Colour		Blue RAL 5024	
M/PG		M40	
Ø d2 (mm)		48	
L (mm)		2	
kg/u		0,005	
u		100	
Material		NBR	
IP		IP68	
Working temperature range (°C)		-25 / 120 °C	
Fire resistance		Flame retardant	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

