


O-Ring

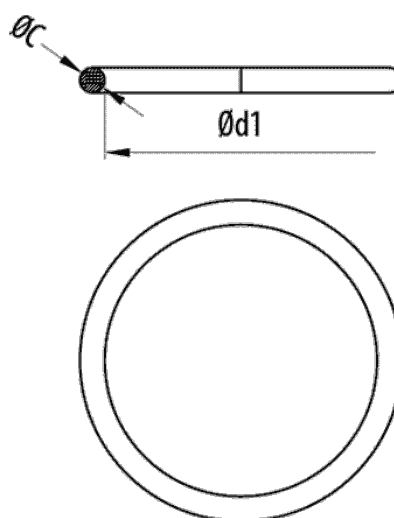

Description

O-ring suitable for use on the external thread of fittings and cable glands, which provides an IP68 protection rating in accordance with EN 60529. Available in metric threads from M12 to M63 and threads PG7 to PG48. Manufactured from NBR and in black colour RAL 9005.

Advantages

Manufactured in NBR elastomer in black colour RAL 9005.

Protection index EN 60529: IP68.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for improving the tightness or the IP rating in the external thread of fittings for conduits or cable glands for the conduction or protection of wiring in general and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

Colour	Black RAL 9005		PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63		NBR
IP68	-25 / 120 °C	Flame retardant	ETIM 10 EC001181		

Product data

		C _{mm}	Ref	kg/u	
PG 7	9	1.5	39096007	0,000	500
PG 9	12	1.5	39096009	0,000	500
PG11	16	1.5	39096011	0,000	500
PG13	17.2	1.8	39096013	0,000	500
PG16	22	2	39096016	0,000	500
PG21	29	2	39096021	0,000	500
PG29	33	2	39096029	0,000	250
PG36	43	2	39096036	0,001	100
PG48	55	2	39096048	0,001	50
M12	9	1.5	39096112	8,000	500
M16	12	1.5	39096116	0,000	500
M20	17.2	1.8	39096120	0,000	500
M25	22	2	39096125	0,000	500
M32	29	2	39096132	0,000	250
M40	35	2	39096140	0,001	50
M50	43	2	39096150	0,001	50
M63	55	2	39096163	0,001	50

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6

O-Ring

- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

