
RE-MS Adaptor



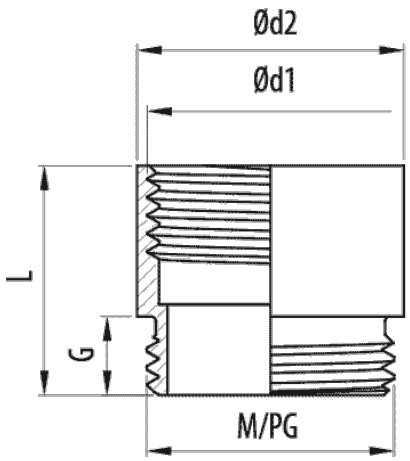

Description

Metal metric/PG thread adaptor for fittings and cable glands. Available in different sizes. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for adapting metric threads to PG and vice versa in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

LTN | M16, M20, M25, M32, PG 9, PG11, PG13, PG16, PG21 | Nickel-plated brass

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC000938

Product data

M16	6	PG 9	20	16.5	43001609	0,020	100	-45 / 150 ºC
M20	6.5	PG11	22	19	43002011	0,020	100	-45 / 150 ºC
M20	6.5	PG13	22	19	43002013	0,010	100	-45 / 150 ºC
M20	6.5	PG16	24	19	43002016	0,020	100	-45 / 150 ºC
M25	6.5	PG16	28	19	43002516	0,050	50	-45 / 150 ºC
M25	6.5	PG21	30	21	43002521	0,020	50	-45 / 150 ºC
M32	7	PG29	39	23	43003229	0,050	25	-45 / 150 ºC
PG 9	6	M16	20	16.5	43010916	0,020	100	-45 / 150 ºC
PG11	6.5	M20	22	19	43011120	0,020	100	-45 / 150 ºC
PG13	6.5	M20	22	19	43011320	0,020	100	-45 / 150 ºC
PG16	6.5	M25	27	21	43011625	0,040	50	-45 / 150 ºC
PG21	7	M32	35	21	81000214	0,045	100	-40 / 100 ºC

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RE-MS Adaptor

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."