


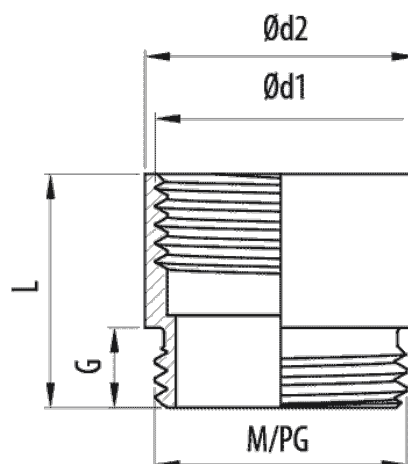

Description

Metal metric/PG thread adaptor for fittings and cable glands. Available in different sizes. Made of nickel-plated brass.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

Applications

Suitable for adapting metric threads to PG and vice versa in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

Solutions



Product data

ETIM 10	EC000938	L (mm)	16.5
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,020
Protection System	LTN	u	100
Finish	Nickel-plated brass	Material	Nickel-plated brass
M/PG	PG 9	Working temperature range (°C)	-45 / 150 °C
G (mm)	6	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
M/PG 2	M16		
Ø d2 (mm)	20		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

