


## E-MS Enlarger

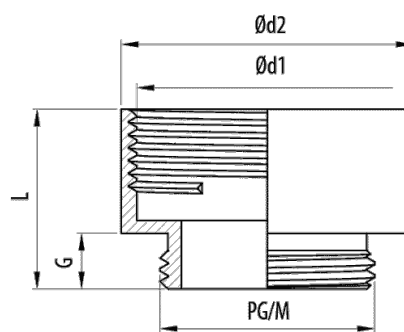

### Description

Metal extension for metric and PG thread. Available in different sizes. Made of nickel-plated brass.

### Advantages

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

CE conformity to the 2014/35 directive and the IEC 61386 standard.

### Applications

Suitable for the extension of threads in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

### Solutions



Main technical characteristics

LTN	Nickel-plated brass	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, M12, M16, M20, M25, M32, M40, M50	
Nickel-plated brass	-45 / 150 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM EC000938

Product data

				L <sub>mm</sub>	R <sub>ref</sub>	kg/u	
PG 7	5	PG 9	17	15	42020709	0.007	100
PG 9	6	PG11	20	16.5	42020911	0.009	100
PG 9	6	PG13	22	17.5	42020913	0.010	100
PG11	6	PG13	22	17.5	42021113	0.012	100
PG11	6	PG16	24	18.5	42021116	0.013	100
PG13	6.5	PG16	24	19	42021316	0.012	100
PG16	6.5	PG21	30	21	42021621	0.024	50
PG21	7	PG29	39	23	42022129	0.038	50
PG29	8	PG36	50	28	42022936	0.078	25
M12	5	M16	18	15	42051216	0.010	100
M16	6	M20	22	17.5	42051620	0.010	100
M20	6.5	M25	27	19	42052025	0.020	50
M25	8	M32	34	20.5	42052532	0.030	50
M32	7	M40	42	23	42053240	0.050	25
M40	9	M50	53	31	42054050	0.093	25
M50	9.5	M63	65	24	42055063	0.161	10

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12

E-MS Enlarger

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

