


**E-MS Enlarger** ( Ref: 42020913 )

1/2

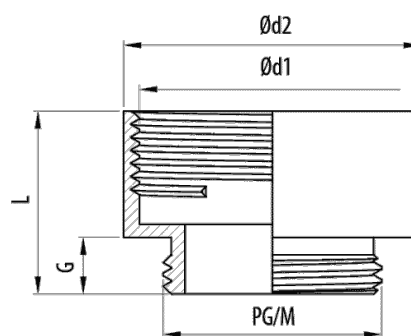

**Description**

Metal extension for metric and PG thread. Available in different sizes. Made of nickel-plated brass.

**Advantages**

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

**Applications**

Suitable for the extension of threads in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                     |                                       |                                              |
|----------------------------------------------|---------------------|---------------------------------------|----------------------------------------------|
| <b>ETIM 10</b>                               | EC000938            | <b>L (mm)</b>                         | 17.5                                         |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |                     | <b>kg/u</b>                           | 0,010                                        |
| <b>Protection System</b>                     | LTN                 | <b>u</b>                              | 100                                          |
| <b>Finish</b>                                | Nickel-plated brass | <b>Material</b>                       | Nickel-plated brass                          |
| <b>M/PG</b>                                  | PG 9                | <b>Working temperature range (°C)</b> | -45 / 150 °C                                 |
| <b>G (mm)</b>                                | 6                   | <b>Fire resistance</b>                | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| <b>M/PG 2</b>                                | PG13                |                                       |                                              |
| <b>Ø d2 (mm)</b>                             | 22                  |                                       |                                              |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

