


E-MS Enlarger (Ref: 42053240)

1/2

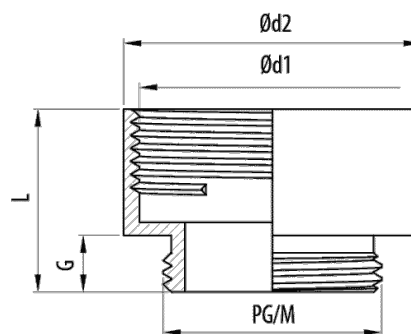

Description

Metal extension for metric and PG thread. Available in different sizes. Made of nickel-plated brass.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

Applications

Suitable for the extension of threads in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC000938	L (mm)	23
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,050
Protection System	LTN	u	25
Finish	Nickel-plated brass	Material	Nickel-plated brass
M/PG	M32	Working temperature range (°C)	-45 / 150 °C
G (mm)	7	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
M/PG 2	M40		
Ø d2 (mm)	42		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

