


HEXADIN-M Cablegland

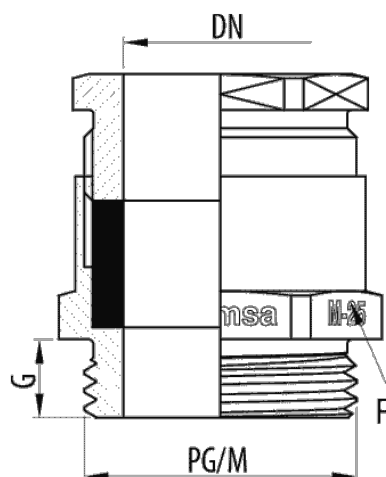

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Available in metric threads from M12 to M63 and in PG7 to PG48 threads for various cable diameters. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 60°C.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions



Main technical characteristics

LTN	Nickel-plated brass	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63	ETIM EC000441
LATÓN NIQUELADO,NBR	IP54	-15 / 60 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Product data

			L _{mm}		Ref	kg/u	
PG 7	5	6 / 8	20	14	20050007	0.009	50
PG 9	6	4 / 10	21	18	20050009	0.013	50
PG11	6	6.5 / 12	23	20	20050011	0.018	50
PG13	6.5	6.5 / 13.5	26.5	22	20050013	0.024	50
PG16	6.5	6.5 / 16	28.5	24	20050016	0.029	50
PG21	7	9 / 20	31	30	20050021	0.046	25
PG29	8	17 / 28	34	40	20050029	0.087	25
PG36	9	23 / 34	39	50	20050036	0.139	10
PG48	10	35 / 46	47	64	20050048	0.280	5
M12	7	5 / 7	21	14	20051120	0.009	50
M16	7	4 / 9.5	23	18	20051160	0.013	50
M20	7	6 / 13	26.5	22	20051200	0.018	50
M25	8	6 / 15	28.5	27	20051250	0.029	50
M32	8.5	9 / 20	31	33	20051320	0.045	25
M40	8.5	15 / 27	34	40	20051400	0.085	10
M50	9.5	21 / 33	39	50	20051500	0.137	5
M63	10.5	30 / 45	47	65	20051630	0.278	5

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6

Metalic Cableglands

25/04/2024

HEXADIN-M Cablegland

3/3

- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."