


HEXADIN-M Cablegland (Ref: 20051250)

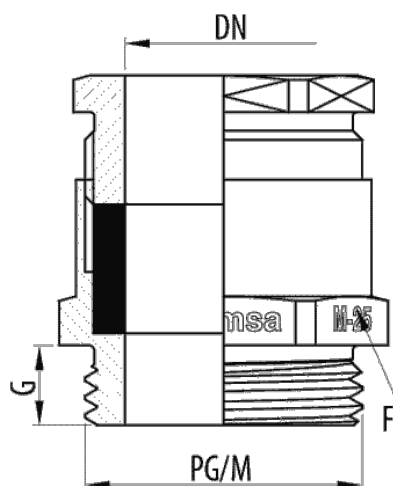

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Available in metric threads from M12 to M63 and in PG7 to PG48 threads for various cable diameters. Made of nickel-plated brass.

Advantages

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 60°C.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions



Product data			
ETIM 10		EC000441	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Nickel-plated brass	
M/PG		M25	
G (mm)		8	
Cable diameter range		6 / 15	
L (mm)		28.5	
Torque wrench		27	
		kg/u	0,029
		u	50
		Material	LATÓN NIQUELADO,NBR
		IP	IP54
		Working temperature range (°C)	-15 / 60 °C
		Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic