


HEXADIN-M-L Cablegland

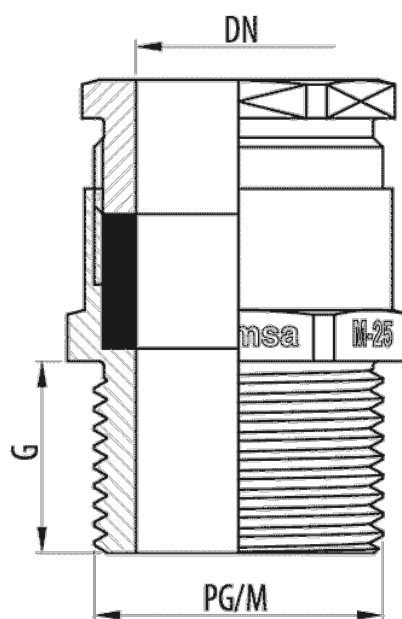

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Longer length thread available PG7 to PG48 for various cable diameters. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Thread of 15 mm in length.

Working temperature: -25°C to + 60°C.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions



Main technical characteristics

 LTN	 PG11, PG13, PG16, PG21, PG29, PG36, PG48	 15	 LATÓN NIQUELADO,NBR	 IP54	 -15 / 60 °C
 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000441				

Product data

						
PG11	6.5 / 12	32	20	20060011	0,024	50
PG13	6.5 / 13.5	35	22	20060013	0,028	50
PG16	6.5 / 16	37	24	20060016	0,036	50
PG21	9 / 20	39	30	20060021	0,054	25
PG29	17 / 28	41	40	20060029	0,102	25
PG36	23 / 34	45	50	20060036	0,155	10
PG48	35 / 46	52	64	20060048	0,308	5

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic