
Metallic Cable glands

17/11/2026

HEXADIN-M-L Cablegland



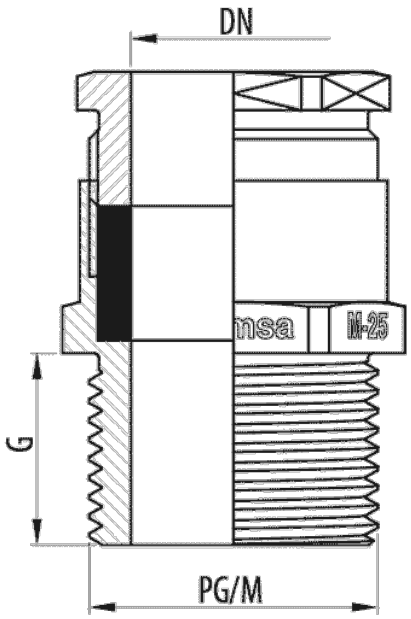

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Longer length thread available PG7 to PG48 for various cable diameters. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Thread of 15 mm in length.

Working temperature: -25°C to + 60°C.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

HEXADIN-M-L Cablegland

Main technical characteristics

LTN | PG11, PG13, PG16, PG21, PG29, PG36, PG48 | 15 | LATÓN NIQUELADO,NBR | IP54 | -15 / 60 °C

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10
EC000441

Product data

PG11	6.5 / 12	32	20	20060011	0,024	50
PG13	6.5 / 13.5	35	22	20060013	0,028	50
PG16	6.5 / 16	37	24	20060016	0,036	50
PG21	9 / 20	39	30	20060021	0,054	25
PG29	17 / 28	41	40	20060029	0,102	25
PG36	23 / 34	45	50	20060036	0,155	10
PG48	35 / 46	52	64	20060048	0,308	5

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."