
Metallic Cable glands

18/11/2026

HEXADIN-M-L Cablegland (Ref: 20060013)



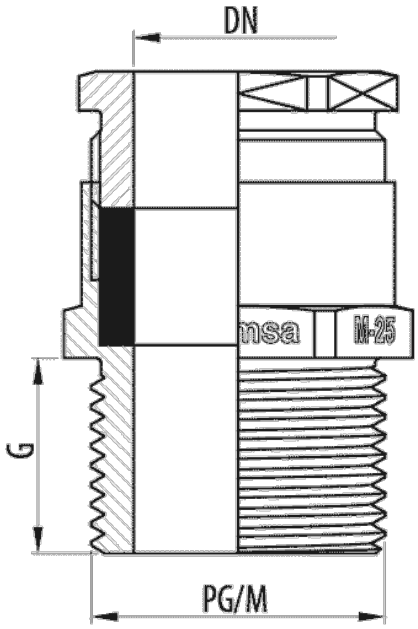

Description

Metal cable gland with neoprene seal and an IP54 protection rating in accordance with EN 60529. Longer length thread available PG7 to PG48 for various cable diameters. Made of nickel-plated brass.

Advantages

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Made of nickel-plated brass.

Protection index EN 60529: IP54.

Thread of 15 mm in length.

Working temperature: -25°C to + 60°C.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

HEXADIN-M-L Cablegland (Ref: 20060013)

Product data

ETIM 10	EC000441
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Protection System	LTN
Finish	Nickel-plated brass
M/PG	PG13
G (mm)	15
Cable diameter range	6.5 / 13.5
L (mm)	35
Torque wrench	22

kg/u	0,028
u	50
Material	LATÓN NIQUELADO,NBR
IP	IP54
Working temperature range (°C)	-15 / 60 ºC
Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."