


HEXADIN-P Cablegland

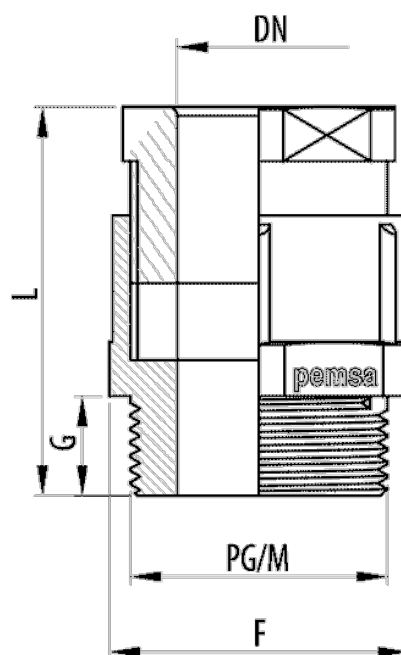

Description

Cable gland with TPV soft rubber seal and a protection rating of IP54 according to EN 60529. Available in metric thread from M12 to M40 and PG7 to PG36 thread for various cable diameters. Made of self-extinguishing polyamide 6 in grey colour RAL 7035.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection index EN 60529: IP54.

Available in grey colour RAL 7035.

Working temperature: -25°C to + 90°C.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

Colour Grey RAL 7035	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, M12, M16, M20, M25	Polyamide 6	IP54
-25 / 60 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000441	

Product data

		Ø	L _{mm}		Ref	kg/u	
PG 7	8	3.5 / 6	29	15	20010007	0,004	50
PG 9	8	4.5 / 7	30	19	20010009	0,006	50
PG11	8	6 / 9	30	22	20010011	0,009	50
PG13	9	9 / 12	35	24	20010013	0,010	50
PG16	10	11 / 14	38	27	20010016	0,012	50
PG21	11	14 / 18	43	33	20010021	0,021	50
PG29	11	18 / 25	46	42	20010029	0,046	25
PG36	13	25 / 32	62	53	20010036	0,073	10
M12	8	3.5 / 6	29	15	20011120	0,004	50
M16	8	4.5 / 7	30	19	20011160	0,006	50
M16	8	6 / 9	30	22	20011161	0,009	50
M20	9	9 / 12	35	24	20011200	0,010	50
M20	10	11 / 14	38	27	20011201	0,012	50
M25	11	14 / 18	43	33	20011250	0,021	50

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene



Plastic Cable glands

15/07/2026

HEXADIN-P Cablegland

3/3

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."