
Plastic Cable glands

18/11/2026

HEXADIN-P Cablegland (Ref: 20010007)



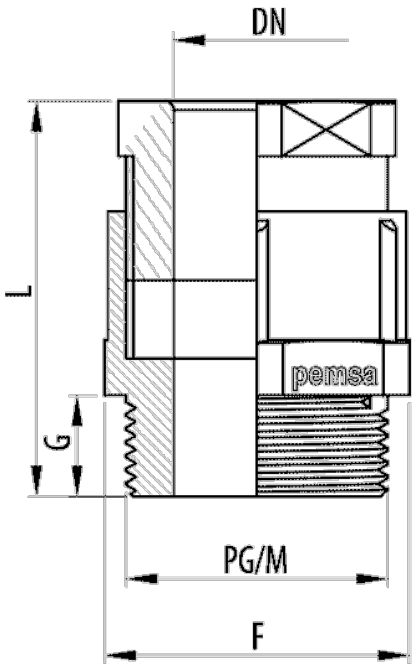

Description

Cable gland with TPV soft rubber seal and a protection rating of IP54 according to EN 60529. Available in metric thread from M12 to M40 and PG7 to PG36 thread for various cable diameters. Made of self-extinguishing polyamide 6 in grey colour RAL 7035.

Advantages

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Available in grey colour RAL 7035.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

Applications

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

HEXADIN-P Cablegland (Ref: 20010007)

Product data

ETIM 10	EC000441	**kg/u**	0,004
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	50
Colour	Grey RAL 7035	**Material**	Polyamide 6
M/PG	PG 7	**IP**	IP54
G (mm)	8	**Working temperature range (°C)**	-25 / 60 ºC
Cable diameter range	3.5 / 6	**Fire resistance**	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	29		
Torque wrench	15		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."