


**HEXADIN-P Cablegland** ( Ref: 20011160 )

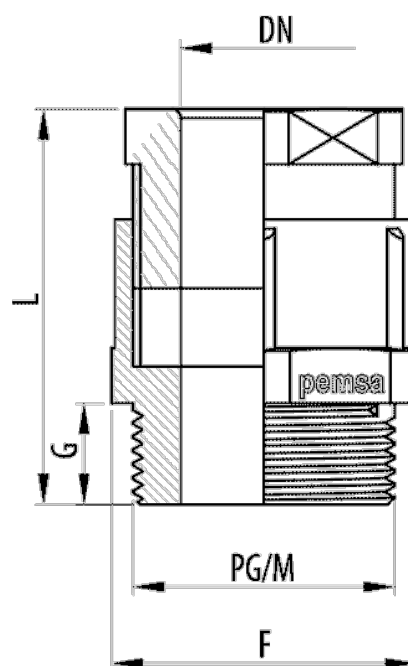

**Description**

Cable gland with TPV soft rubber seal and a protection rating of IP54 according to EN 60529. Available in metric thread from M12 to M40 and PG7 to PG36 thread for various cable diameters. Made of self-extinguishing polyamide 6 in grey colour RAL 7035.

**Advantages**

CE conformity with regard to directive 2014/35 and standard IEC 62444.

Available in grey colour RAL 7035.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection index EN 60529: IP54.

Working temperature: -25°C to + 90°C.

**Applications**

Its use is recommended for the protection of wiring and conductors in general applications and tertiary sector.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## Product data

|                                              |               |                                       |                                              |
|----------------------------------------------|---------------|---------------------------------------|----------------------------------------------|
| <b>ETIM 10</b>                               | EC000441      | <b>kg/u</b>                           | 0,006                                        |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |               | <b>u</b>                              | 50                                           |
| <b>Colour</b>                                | Grey RAL 7035 | <b>Material</b>                       | Polyamide 6                                  |
| <b>M/PG</b>                                  | M16           | <b>IP</b>                             | IP54                                         |
| <b>G (mm)</b>                                | 8             | <b>Working temperature range (°C)</b> | -25 / 60 °C                                  |
| <b>Cable diameter range</b>                  | 4.5 / 7       | <b>Fire resistance</b>                | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| <b>L (mm)</b>                                | 30            |                                       |                                              |
| <b>Torque wrench</b>                         | 19            |                                       |                                              |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

