


HSK-K L Cablegland

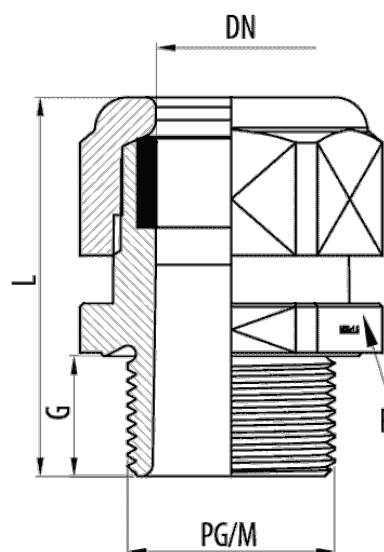

Description

Cable gland with improved diaphragm closure system and NBR seal, long thread and IP68 protection rating (10 bar) according to EN 60529. Available in metric threads from M12 to M63 and in PG7 to PG48 threads for various diameters of cable. Made of self-extinguishing polyamide 6 in grey RAL 7035 and black RAL 9005. Industrial and special applications.

Advantages

Made of self-extinguishing Polyamide 6. V0 fire resistance according to UL 94. Halogen free. Resistant to UV radiation, UL_f1 classification.

Protection index EN 60529: IP68 with 10 bars of pressure for immersion in water.

Improved diaphragm closure system with NBR inner seal.

Working temperature: -40°C to + 100°C.

UL Classified Certification. Certification CSA, GL, VDE, EAC, NF. CE conformance with the 2014/35 directive and the IEC 62444 standard.

Applications

Its use is recommended for the protection of wiring and conductors with high sealing requirements in industrial installations, manufacture of OEM equipment and in industrial and marine applications.

Solutions



RAILWAY APPLICATIONS



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 Colour	Grey RAL 7035		M12, M16, M20, M25, M32, M40		NBR,POLIAMIDA 6		IP68		-25 / 90 °C
	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM 10	EC000441				

Product data

						Ref	kg/u	
M12	15	3 / 6.5	9	36	15	22015120	0,010	50
M16	15	4 / 8	11	37	19	22015160	0,010	50
M16	15	5 / 10	14	40	22	22015161	0,010	50
M20	15	6 / 12	16	42	24	22015200	0,010	50
M20	15	10 / 14	18	43	27	22015201	0,010	50
M25	15	13 / 18	22	46	33	22015250	0,020	50
M32	15	18 / 25	30	54	42	22015320	0,051	25
M40	18	22 / 32	39	66	53	22015400	0,072	10

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic