


IRIS AIR Cablegland

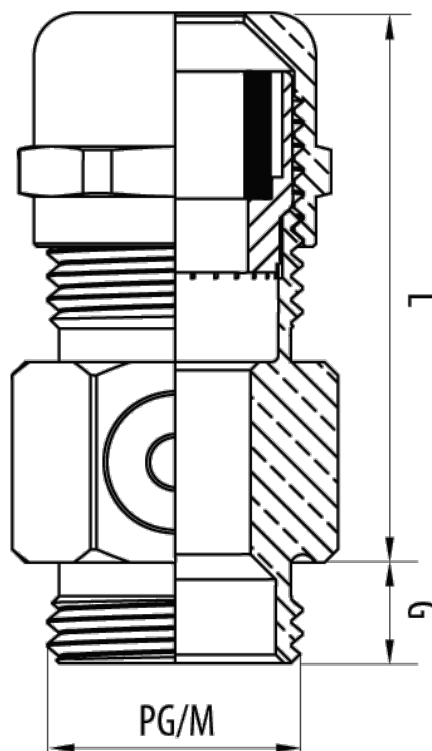

Description

Advantages

Applications

Solutions



Main technical characteristics

LTN	Nickel-plated brass	PG 7, PG 9, PG11, PG13, M12, M16, M20	LATÓN NIQUELADO,NBR,POLIAMIDA 6	IP68
-20 / 100 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM		

Product data

		Ø		L _{mm}		Ref	kg/u	
PG 7	6	4 / 8	11	37.5	17	21074007	0.030	100
PG 9	6	4 / 8	11	37.5	17	21074009	0.031	50
PG11	6	5 / 10	14	39.5	20	21074011	0.055	50
PG13	6.5	6 / 12	16	41.5	22	21074013	0.046	50
M12	6	4 / 8	11	37.5	17	21075120	0.031	100
M16	6	4 / 8	11	37.5	17	21075160	0.031	50
M16	6	5 / 10	14	39.5	20	21075161	0.054	50
M20	8	6 / 12	16	43	22	21075200	0.048	50
PG 7	8	4 / 8	11	39.5	17	21076007	0.031	100
PG 9	8	4 / 8	11	39.5	17	21076009	0.031	50
PG11	8	5 / 10	14	41.5	20	21076011	0.044	50
PG13	8	6 / 12	16	43	22	21076013	0.048	50
M12	8	4 / 8	11	39.5	17	21077120	0.032	100
M16	8	4 / 8	11	39.5	17	21077160	0.033	50
M16	8	5 / 10	14	41.5	22	21077161	0.055	50

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane



IRIS AIR Cablegland

- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

