


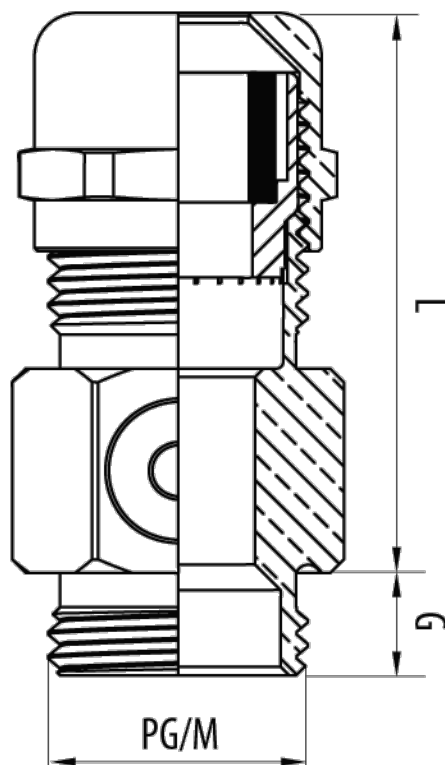

Description

Advantages

Applications

Solutions



Product data			
Protection System	LTN	Torque wrench	20
Finish	Nickel-plated brass	kg/u	0.055
M/PG	PG11	u	50
G (mm)	6	Material	LATÓN NIQUELADO,NBR,POLIAMIDA 6
Cable diameter range	5 / 10	IP	IP68
Ø d1 (mm)	14	Working temperature range (°C)	-20 / 100 °C
L (mm)	39.5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

- Protection System
- CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN
- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

- Insulating materials
- PC+ABS

PVC

PP

PA6

PA12

PU

PE

NBR

PET

TPV
- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic