


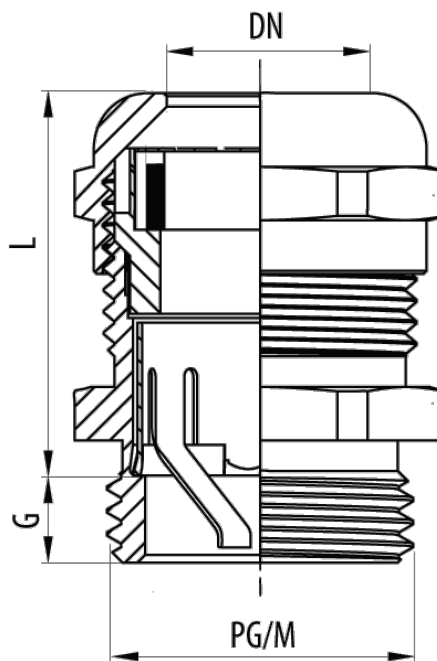

Description

Advantages

Applications

Solutions



Product data			
ETIM 10		EC000441	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Nickel-plated brass	
M/PG		PG13	
G (mm)		6.5	
Cable diameter range		6 / 12	
Ø d1 (mm)		16	
L (mm)		33	
Torque wrench		22	
kg/u		0,030	
u		50	
Material		LATÓN NIQUELADO,NBR,POLIAMIDA 6	
IP		IP68	
Working temperature range (°C)		-20 / 100 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic