


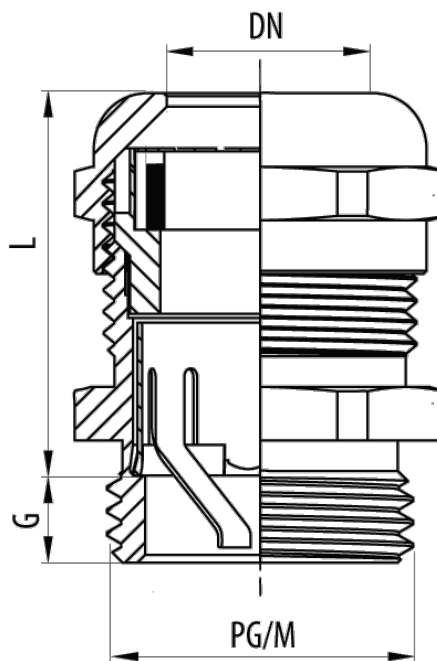

Description

Advantages

Applications

Solutions



Product data

ETIM 10	EC000441	Torque wrench	24
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,037
Protection System	LTN	u	50
Finish	Nickel-plated brass	Material	LATÓN NIQUELADO,NBR,POLIAMIDA 6
M/PG	PG16	IP	IP68
G (mm)	6.5	Working temperature range (°C)	-20 / 100 °C
Cable diameter range	10 / 14	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d1 (mm)	18		
L (mm)	34.5		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

