


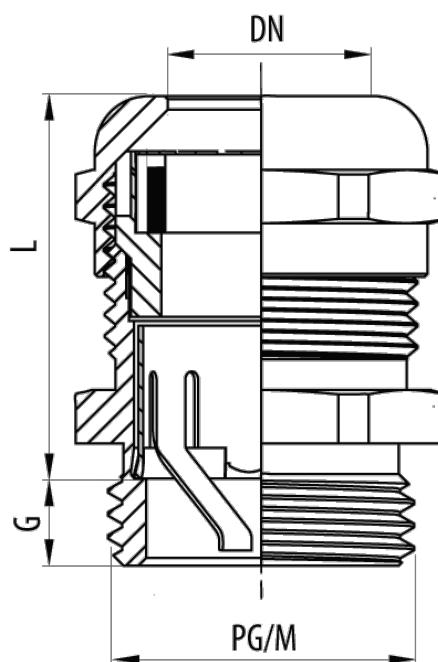

Description

Advantages

Applications

Solutions



Product data

ETIM 10	EC000441	Torque wrench	14
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,013
Protection System	LTN	u	100
Finish	Nickel-plated brass	Material	LATÓN NIQUELADO,NBR,POLIAMIDA 6
M/PG	M12	IP	IP68
G (mm)	6	Working temperature range (°C)	-20 / 100 °C
Cable diameter range	3 / 6.5	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d1 (mm)	9		
L (mm)	28		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

