


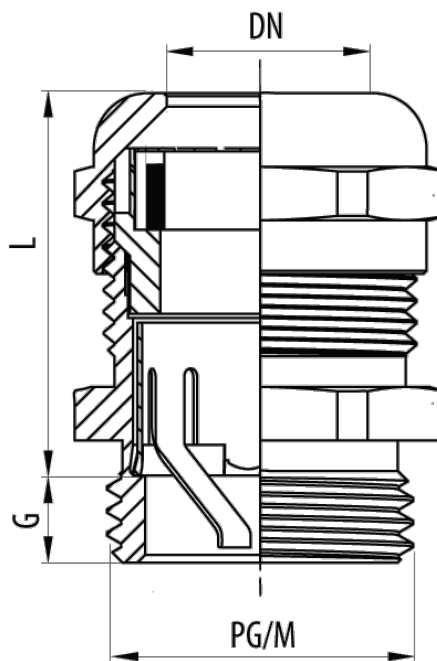

Description

Advantages

Applications

Solutions



Product data

ETIM 10	EC000441	Torque wrench	55
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,257
Protection System	LTN	u	5
Finish	Nickel-plated brass	Material	LATÓN NIQUELADO,NBR,POLIAMIDA 6
M/PG	M50	IP	IP68
G (mm)	9	Working temperature range (°C)	-20 / 100 °C
Cable diameter range	22 / 32	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d1 (mm)	39		
L (mm)	57		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

