


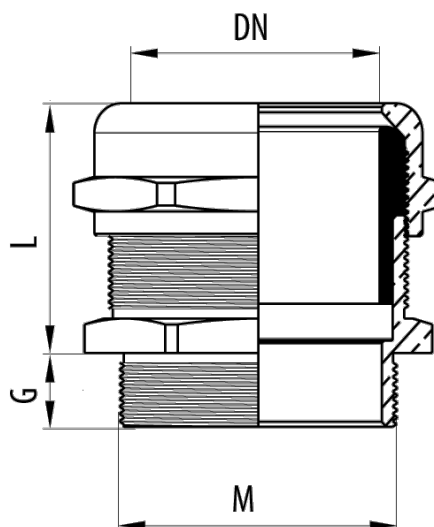

Description

Advantages

Applications

Solutions



Product data

ETIM 10	EC000441	kg/u	0,518
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	5
Protection System	LTN	Material	LATÓN NIQUELADO,NBR
Finish	Nickel-plated brass	IP	IP68
M/PG	M63	Working temperature range (°C)	-20 / 100 °C
G (mm)	15	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Cable diameter range	45 / 55		
L (mm)	63		
Torque wrench	70		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

