


## R-H Reducer

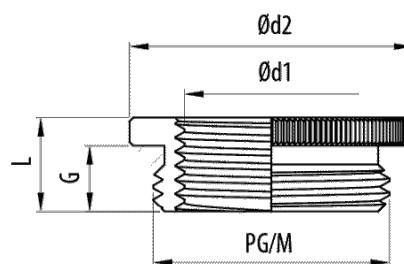

### Description

Metal reducer for metric thread. Available in different sizes. Made of nickel-plated brass.

### Advantages

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

### Applications

Suitable for the reduction of metric threads in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

### Solutions



# R-H Reducer

2/3

## Main technical characteristics

|              |                                                                                    |                     |
|--------------|------------------------------------------------------------------------------------|---------------------|
| LTN          | M16, M20, M25, M32, M40, M50, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48 | Nickel-plated brass |
| -45 / 150 °C | LIBRE DE HALÓGENOS, NO PROPAGADOR DE LA LLAMA                                      | ETIM 10<br>EC000938 |

## Product data

|      |     |      |    | L <sub>mm</sub> | R <sub>mm</sub> | kg/u  |     |
|------|-----|------|----|-----------------|-----------------|-------|-----|
| M16  | 6   | M12  | 18 | 8.5             | 42001612        | 0,010 | 100 |
| M20  | 6.5 | M16  | 24 | 9               | 42002016        | 0,007 | 100 |
| M25  | 7   | M16  | 30 | 10              | 42002516        | 0,030 | 50  |
| M25  | 7   | M20  | 30 | 10              | 42002520        | 0,020 | 50  |
| M32  | 8   | M20  | 39 | 11.5            | 42003220        | 0,050 | 50  |
| M32  | 8   | M25  | 39 | 11.5            | 42003225        | 0,030 | 50  |
| M40  | 8   | M25  | 43 | 11.5            | 42004025        | 0,040 | 25  |
| M40  | 9   | M32  | 43 | 12.5            | 42004032        | 0,040 | 25  |
| M50  | 10  | M32  | 57 | 14              | 42005032        | 0,121 | 10  |
| PG 9 | 6   | PG 7 | 17 | 8.5             | 81000194        | 0,006 | 100 |
| PG11 | 6   | PG 7 | 20 | 8.5             | 81000195        | 0,010 | 100 |
| PG11 | 6   | PG 9 | 20 | 8.5             | 81000196        | 0,005 | 100 |
| PG13 | 6.5 | PG 9 | 22 | 9               | 81000197        | 0,011 | 100 |
| PG13 | 6.5 | PG11 | 22 | 9               | 81000198        | 0,004 | 100 |
| PG16 | 6.5 | PG 9 | 24 | 9.5             | 81000199        | 0,007 | 100 |
| PG16 | 6.5 | PG11 | 24 | 9.5             | 81000200        | 0,010 | 100 |
| PG16 | 6.5 | PG13 | 24 | 9.5             | 81000201        | 0,006 | 100 |
| PG21 | 7   | PG11 | 30 | 10              | 81000202        | 0,028 | 50  |
| PG21 | 7   | PG13 | 30 | 10              | 81000203        | 0,024 | 50  |
| PG21 | 7   | PG16 | 30 | 10              | 81000204        | 0,019 | 50  |
| PG29 | 8   | PG16 | 39 | 11.5            | 81000205        | 0,065 | 50  |
| PG29 | 8   | PG21 | 39 | 11.5            | 81000206        | 0,042 | 50  |
| PG36 | 9   | PG21 | 50 | 12.5            | 81000207        | 0,117 | 25  |
| PG36 | 9   | PG29 | 50 | 12.5            | 81000208        | 0,070 | 25  |
| PG42 | 10  | PG29 | 57 | 14              | 81000209        | 0,145 | 10  |
| PG42 | 10  | PG36 | 57 | 14              | 81000210        | 0,069 | 10  |
| PG48 | 10  | PG36 | 64 | 14              | 81000211        | 0,074 | 10  |
| PG48 | 10  | PG42 | 64 | 14              | 81000212        | 0,065 | 10  |
| M50  | 10  | M40  | 57 | 14              | 81000213        | 0,094 | 10  |

## Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



R-H Reducer

- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

