
R-H Reducer



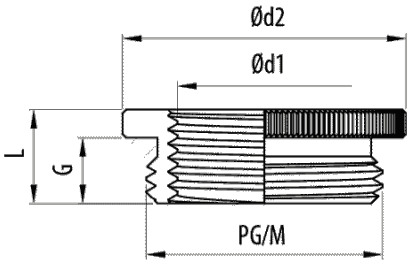

Description

Metal reducer for metric thread. Available in different sizes. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for the reduction of metric threads in cable glands and conduit fittings for the protection and management of wiring in general and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

LTN | M16, M20, M25, M32, M40, M50, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48 | Nickel-plated brass

-45 / 150 °C | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC000938

Product data

M16	6	M12	18	8.5	42001612	0,010	100
M20	6.5	M16	24	9	42002016	0,007	100
M25	7	M16	30	10	42002516	0,030	50
M25	7	M20	30	10	42002520	0,020	50
M32	8	M20	39	11.5	42003220	0,050	50
M32	8	M25	39	11.5	42003225	0,030	50
M40	8	M25	43	11.5	42004025	0,040	25
M40	9	M32	43	12.5	42004032	0,040	25
M50	10	M32	57	14	42005032	0,121	10
PG 9	6	PG 7	17	8.5	81000194	0,006	100
PG11	6	PG 7	20	8.5	81000195	0,010	100
PG11	6	PG 9	20	8.5	81000196	0,005	100
PG13	6.5	PG 9	22	9	81000197	0,011	100
PG13	6.5	PG11	22	9	81000198	0,004	100
PG16	6.5	PG 9	24	9.5	81000199	0,007	100
PG16	6.5	PG11	24	9.5	81000200	0,010	100
PG16	6.5	PG13	24	9.5	81000201	0,006	100
PG21	7	PG11	30	10	81000202	0,028	50
PG21	7	PG13	30	10	81000203	0,024	50
PG21	7	PG16	30	10	81000204	0,019	50
PG29	8	PG16	39	11.5	81000205	0,065	50
PG29	8	PG21	39	11.5	81000206	0,042	50
PG36	9	PG21	50	12.5	81000207	0,117	25
PG36	9	PG29	50	12.5	81000208	0,070	25
PG42	10	PG29	57	14	81000209	0,145	10
PG42	10	PG36	57	14	81000210	0,069	10
PG48	10	PG36	64	14	81000211	0,074	10
PG48	10	PG42	64	14	81000212	0,065	10
M50	10	M40	57	14	81000213	0,094	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."