


TCM Nut

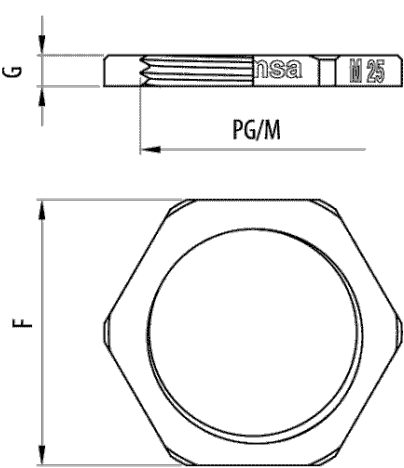

Description

Advantages

Applications

Solutions



Main technical characteristics

LTN	Nickel-plated brass	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63	ETIM EC000129
Nickel-plated brass	-45 / 150 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Product data

			Ref	kg/u	
PG 7	2.8	15	40010007	0.002	100
PG 9	2.8	18	40010009	0.002	100
PG11	3	21	40010011	0.003	100
PG13	3	23	40010013	0.003	100
PG16	3	26	40010016	0.005	100
PG21	3.5	32	40010021	0.007	100
PG29	4	41	40010029	0.012	50
PG36	5	51	40010036	0.019	25
PG42	5	60	40010042	0.029	25
PG48	5.5	64	40010048	0.030	25
M12	2.8	15	40011120	0.002	100
M16	2.8	19	40011160	0.003	100
M20	3	24	40011200	0.004	100
M25	3.5	30	40011250	0.007	100
M32	4	36	40011320	0.010	50
M40	5	46	40011400	0.020	25
M50	5	60	40011500	0.028	25
M63	6	70	40011630	0.046	25

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene

TCM Nut

- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

