
# TCM-INOX Nut

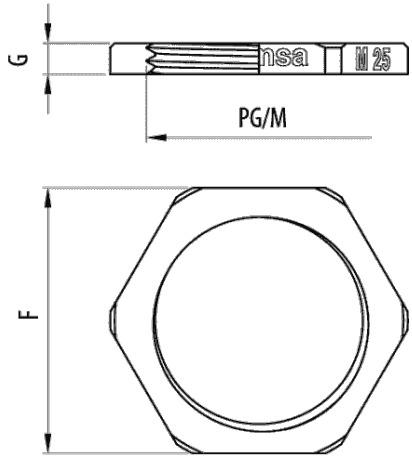


**Description**

**Advantages**

**Applications**

**Solutions**



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## Main technical characteristics

INOX | M12, M16, M20, M25, M32, M40, M50, M63, PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10
EC000940

## Product data

| | | | REF | kg/u | | | |
|---|---|---|---|---|---|---|---|
| M12 | 2.8 | 15 | 40014120 | 0,002 | 20 | Stainless steel AISI 303 | -60 / 200 °C |
| M16 | 2.8 | 19 | 40014160 | 0,003 | 20 | Stainless steel AISI 304 | -45 / 150 °C |
| M20 | 3 | 24 | 40014200 | 0,004 | 20 | Stainless steel AISI 304 | -45 / 150 °C |
| M25 | 3.5 | 30 | 40014250 | 0,009 | 10 | Stainless steel AISI 304 | -45 / 150 °C |
| M32 | 3.5 | 36 | 40014320 | 0,011 | 10 | Stainless steel AISI 304 | -45 / 150 °C |
| M40 | 5 | 46 | 40014400 | 0,019 | 5 | Stainless steel AISI 304 | -45 / 150 °C |
| M50 | 5 | 57 | 40014500 | 0,026 | 5 | Stainless steel AISI 304 | -45 / 150 °C |
| M63 | 6 | 70 | 40014630 | 0,055 | 5 | Stainless steel AISI 304 | -45 / 150 °C |
| PG 7 | 2.8 | 15 | 40015007 | 0,002 | 20 | Stainless steel AISI 303 | -60 / 200 °C |
| PG 9 | 2.8 | 18 | 40015009 | 0,002 | 10 | Stainless steel AISI 303 | -60 / 200 °C |
| PG11 | 3 | 22 | 40015011 | 0,003 | 10 | Stainless steel AISI 303 | -60 / 200 °C |
| PG13 | 3 | 24 | 40015013 | 0,004 | 10 | Stainless steel AISI 303 | -60 / 200 °C |
| PG16 | 3 | 27 | 40015016 | 0,005 | 10 | Stainless steel AISI 303 | -60 / 200 °C |
| PG21 | 3.5 | 32 | 40015021 | 0,008 | 10 | Stainless steel AISI 303 | -60 / 200 °C |
| PG29 | 4 | 41 | 40015029 | 0,010 | 10 | Stainless steel AISI 303 | -60 / 200 °C |
| PG36 | 5 | 50 | 40015036 | 0,018 | 5 | Stainless steel AISI 303 | -60 / 200 °C |
| PG42 | 5 | 60 | 40015042 | 0,033 | 5 | Stainless steel AISI 303 | -60 / 200 °C |
| PG48 | 5.5 | 65 | 40015048 | 0,036 | 5 | Stainless steel AISI 303 | -60 / 200 °C |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# TCM-INOX Nut

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."