
TCP Nut (Ref: 40025500)



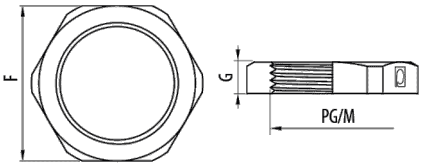

Description

Halogen-free polyamide 6 nut, M50 for connection of fittings and threaded items for plastic rigid, corrugated and flexible conduit systems, in colour Black RAL 9005.

Advantages

Compatible with metric or PG plastic threaded fittings for all ranges of rigid, flexible and corrugated conduits.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in Grey RAL 7035, dark grey RAL 7001 and black RAL 9005.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Working temperature: -25°C to + 105°C.

Applications

Suitable for connection of threaded fittings of all ranges of rigid and flexible plastic conduits for the conduction of electric cables in building and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TCP Nut (Ref: 40025500)

Product data

ETIM 10	EC000940
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Colour	Black RAL 9005
M/PG	M50
G (mm)	8
Torque wrench	60
kg/u	0,010

u	25
Material	Polyamide 6
Working temperature range (°C)	-25 / 105 ºC
Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."