
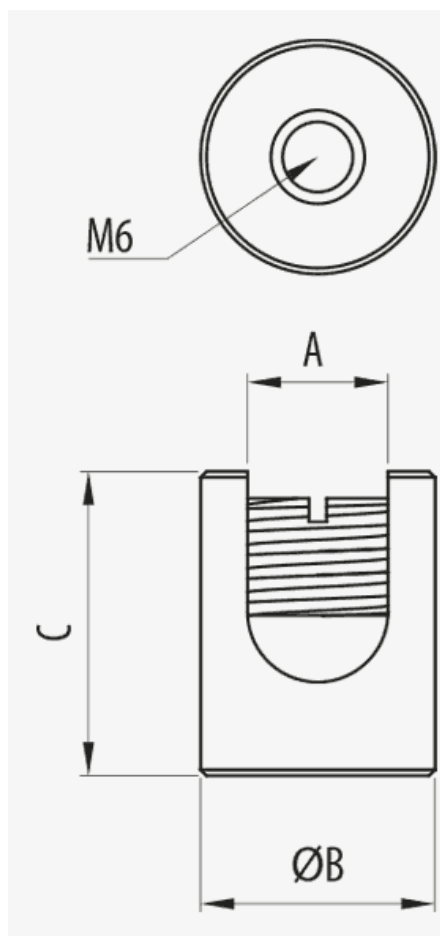


Bonding Connector (Ref: 68000035)

1/18

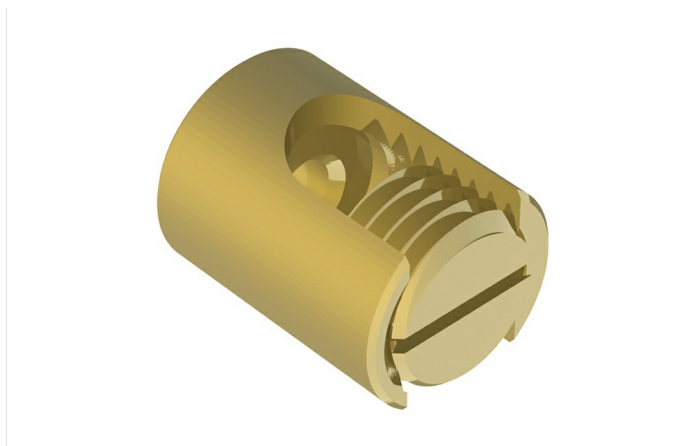

Description

Brass terminal for the equipotential bonding of the Pemsaband® tray and Megaband® ladder or for their connection to the protective conductor and earthing of the electrical installation. Cables of 50-110 mm² of section, Of 8 / 11.5 mm of maximum diameter, With LTN protection system

Advantages

Ensures the equipotentiality of the continuous sections of Pemsaband®.

Economical and reliable design.

It facilitates the earthing of the Pemsaband® tray.

Select the reference according to the size of the conductor.

Applications

It is used for the equipotential connection of the Pemsaband® tray and Megaband® ladder or for their connection to the protective conductor and earthing of the electrical installation.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Bonding Connector (Ref: 68000035)

2/18

Product data

ETIM 10	EC002935	B (mm)	110
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		kg/u	0,043
Protection System	LTN	u	20
Finish	Brass	Material	Brass
Section min (mm2)	50	Working temperature range (°C)	-50 / 150 °C
Cable diameter range	8 / 11.5		
A (mm)	50		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic




www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Bonding Connector (Ref: 68000035)

Product applications

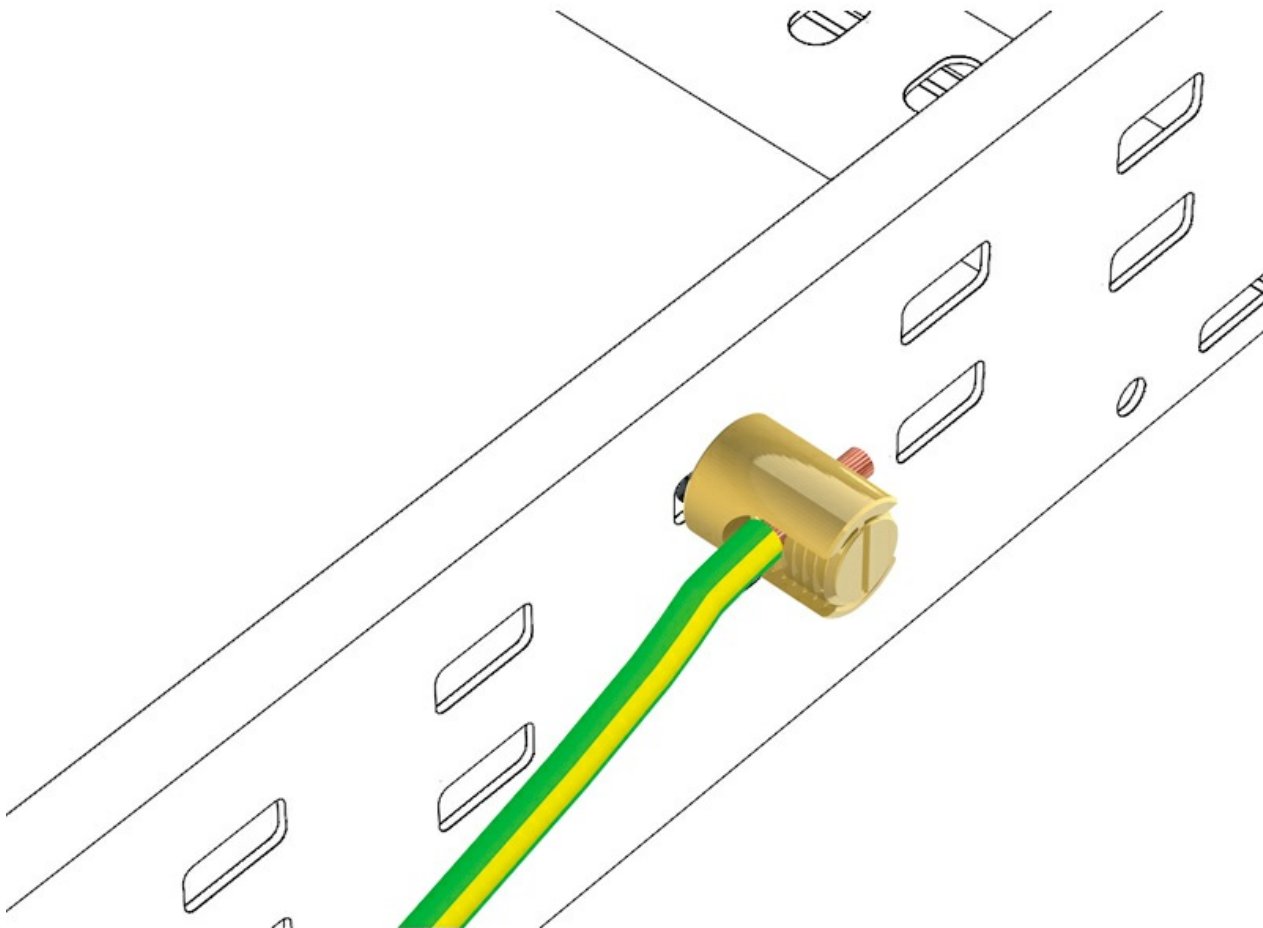


www.pemsa-rejiband.com

Any information included in this document is property of Pemsba®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsba®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsba, Rejband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsba Cable Management, S.A."




Bonding Connector (Ref: 68000035)

4/18

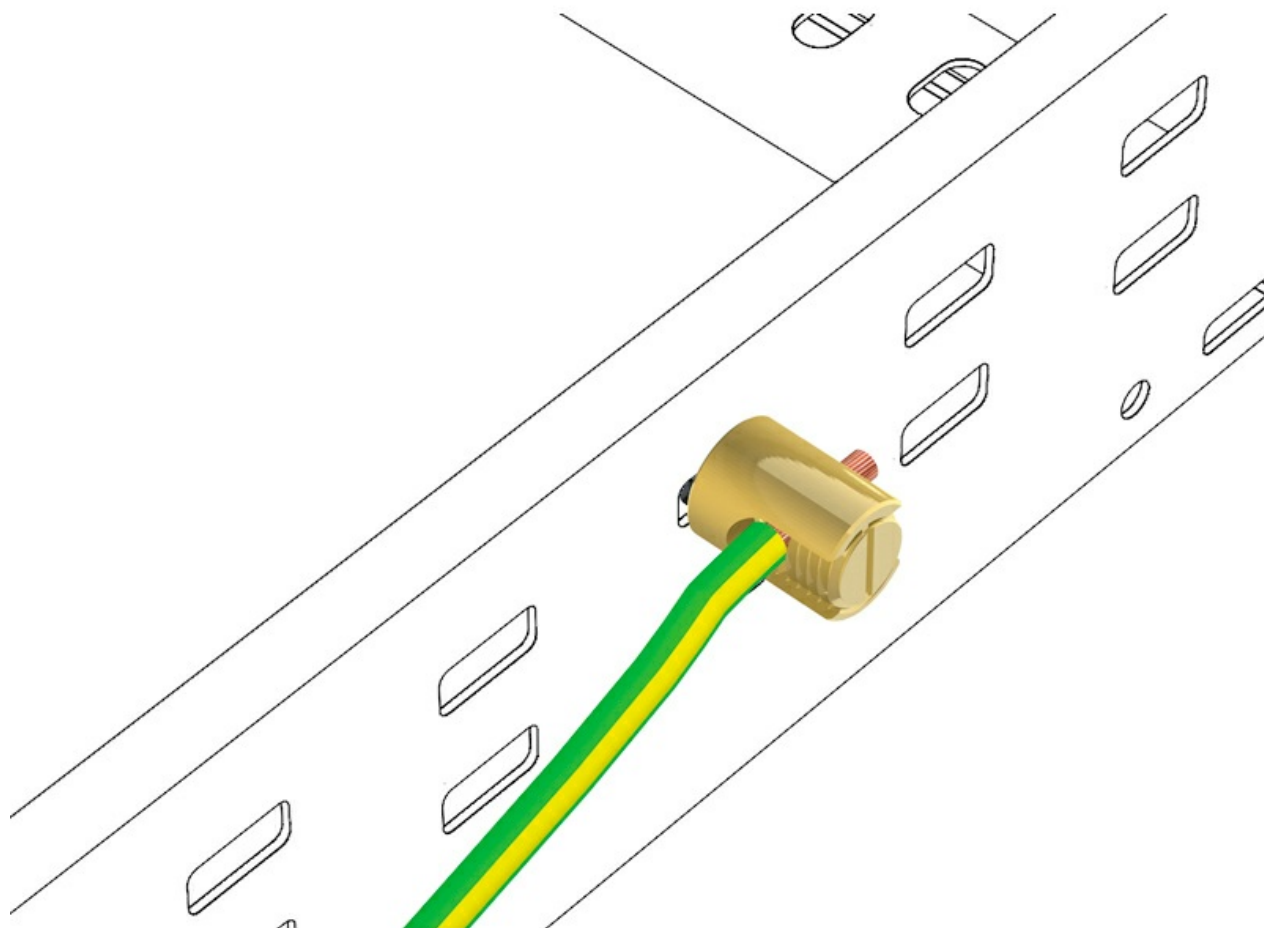


Bonding Connector (Ref: 68000035)

5/18

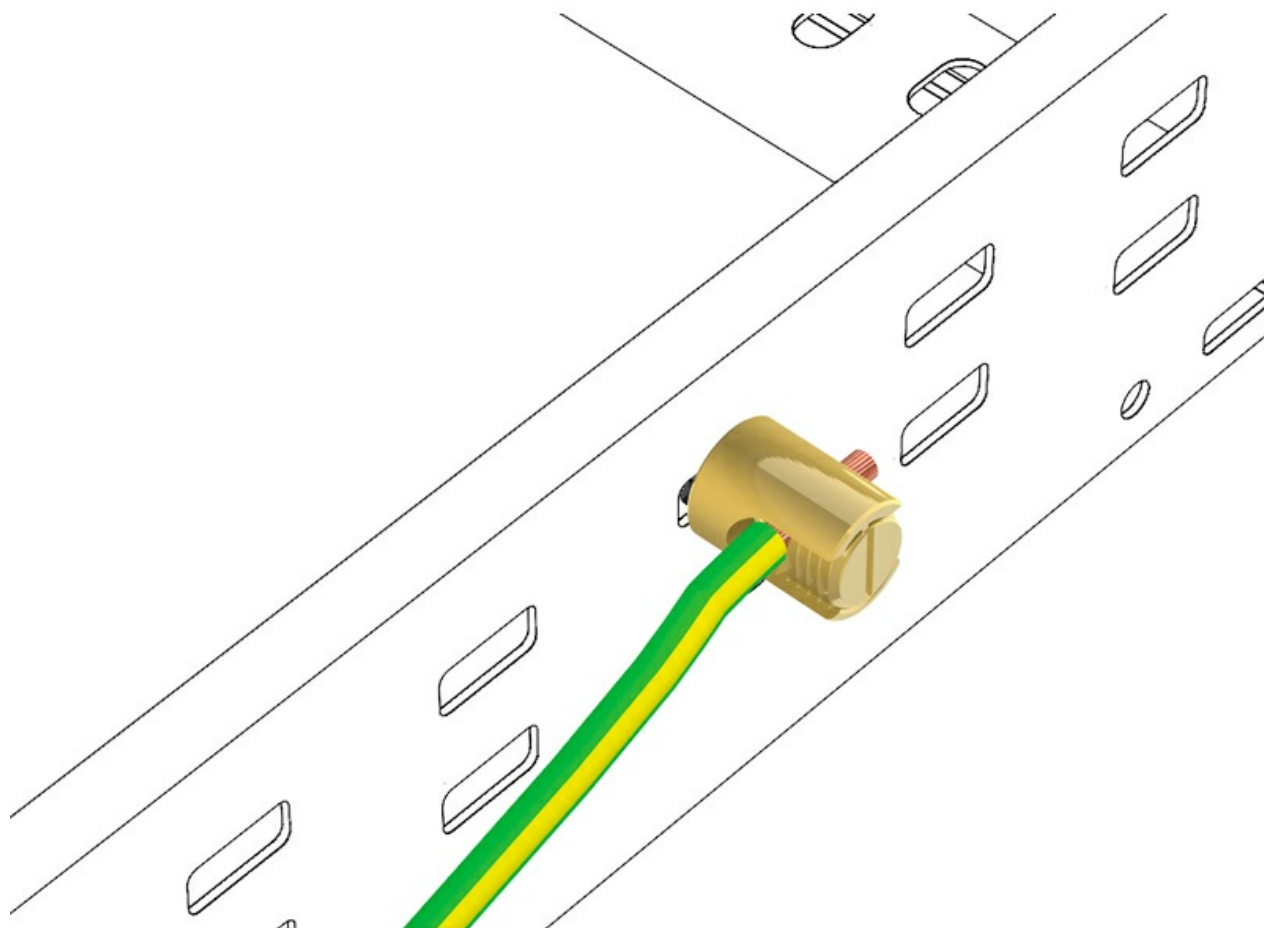

Bonding Connector (Ref: 68000035)

6/18

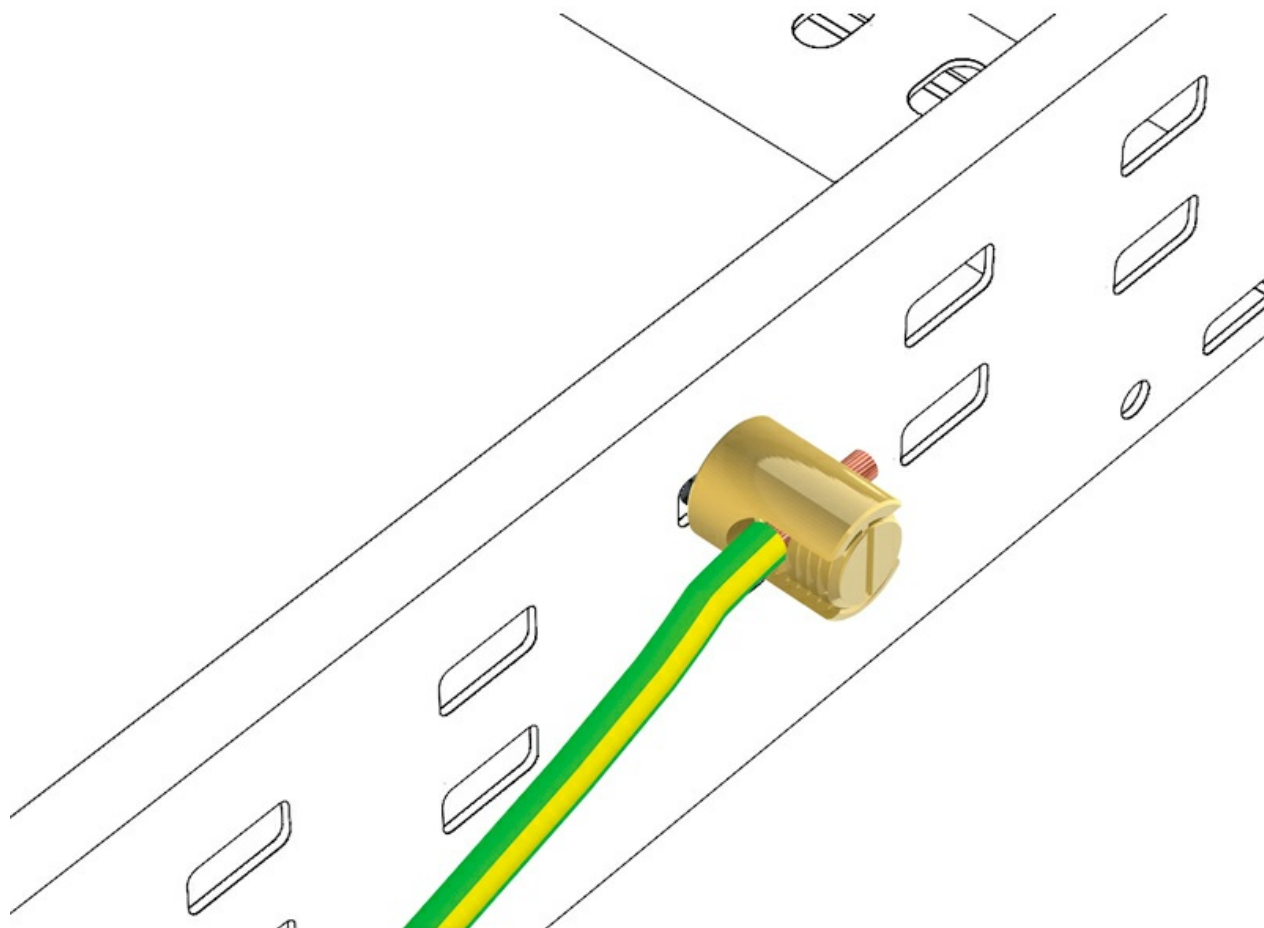

Bonding Connector (Ref: 68000035)

7/18

