


Pemsaband One. Metal Solid Click Cable

1/4

tray (Ref: 75132200)



Description

Solid steel Tray of 35, 60 and 100 mm height, in GC, PG, AZ+, INOX 304 and 316L Protection System with a safety edge. Of 60 mm height, Width 200 mm, With GC protection system. The Pemsaband One® Metal Solid tray is suitable for supporting and routing electrical cables of medium and light loads. Ease of assembly thanks to its Click system of fast coupling between lengths, saving on material and labour, and requiring only 2 bolts for coupling. There are a wide variety of sizes to choose from according to the needs of each installation.

Advantages

Wide variety of sizes, protection systems and accessories to adapt to the requirements of each electrical installation.

Profiled safety edge for cable protection. It also prevents possible cuts when handled by the installer.

Click system for the easy assembly and joining of straight lengths without the need for any other accessories.

In 60 height there are circular pre-punched holes every 1 metre on the flange that are suitable for attaching connectors and conduits.

UL Certified by the requirements of NFPA 70 and NEMA VE 1-2009. N Mark of Aenor according to IEC 61537 and CE Conformity to Directive 2014/35 /EU.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various finishes.

Solutions



EDIFICACIÓN. TERCIARIO RESISTENCIA AL FUEGO



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Pemsaband One. Metal Solid Click Cable

2/4

(Ref: 75132200)

Product data			
Protection System	GC	u	12
Finish	HDG, Hot Dip Galvanised	Material	Steel with surface coating
Resistance Class	Class 5	Impact Strength (J)	20 J
Flange (mm)	60	Section (mm2)	11472
Width (mm)	200	IP	IP44
Length (m)	3	Working temperature range (°C)	-50 / 150 °C
kg/u	1.840	Fire resistance	A1 No combustible



Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass



Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic



Pemsaband One. Metal Solid Click Cable




tray (Ref: 75132200)

Load diagrams

		mm²
mm	mm	
35	100	3122
	150	4822
	200	6522
	300	9922
	400	13322



		mm²
mm	mm	
60	60	3.122
	100	5.572
	150	8.522
	200	11.472
	300	17.372
	400	23.272
	500	29.172
	600	35.072

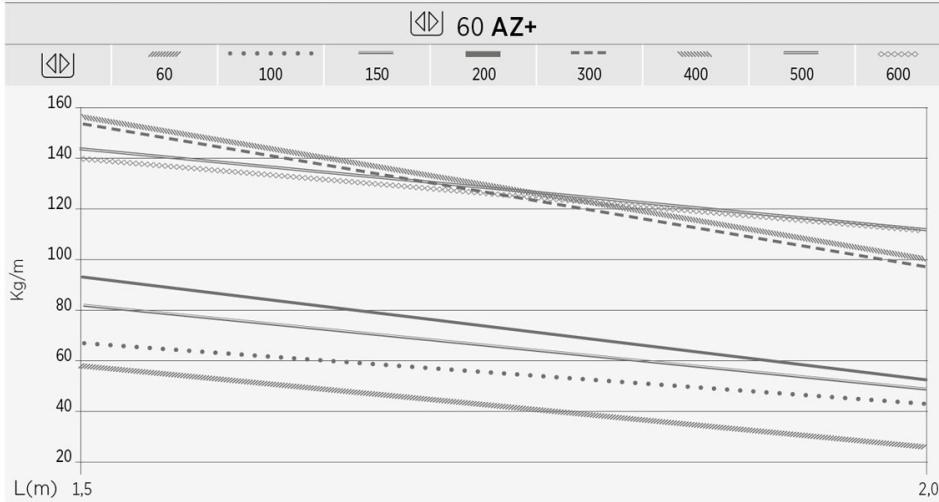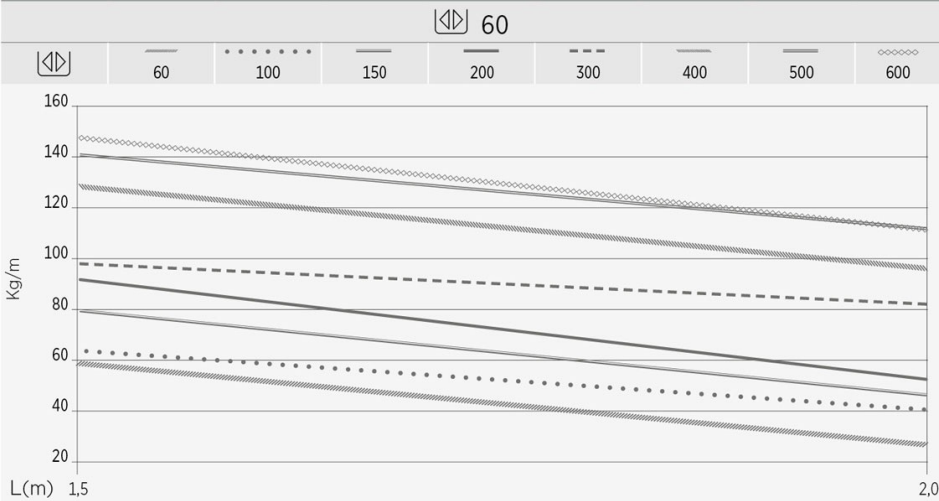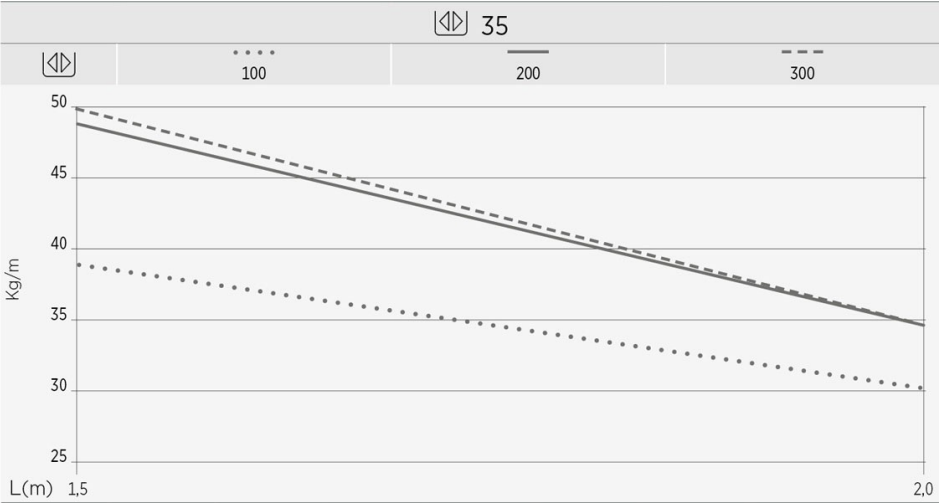
		mm²	e mm
mm	mm		
AZ+ 60	60	3.122	0,6
	100	5.572	0,6
	150	8.522	0,6
	200	11.472	0,6
	300	17.372	0,8
	400	23.272	0,8
	500	29.172	0,8
	600	35.072	0,8




Pemsaband One. Metal Solid Click Cable

tray (Ref: 75132200)

		
mm	mm	mm ²
100	100	9.492
	200	19.392
	300	29.292
	400	39.192
	500	49.092
	600	58.992

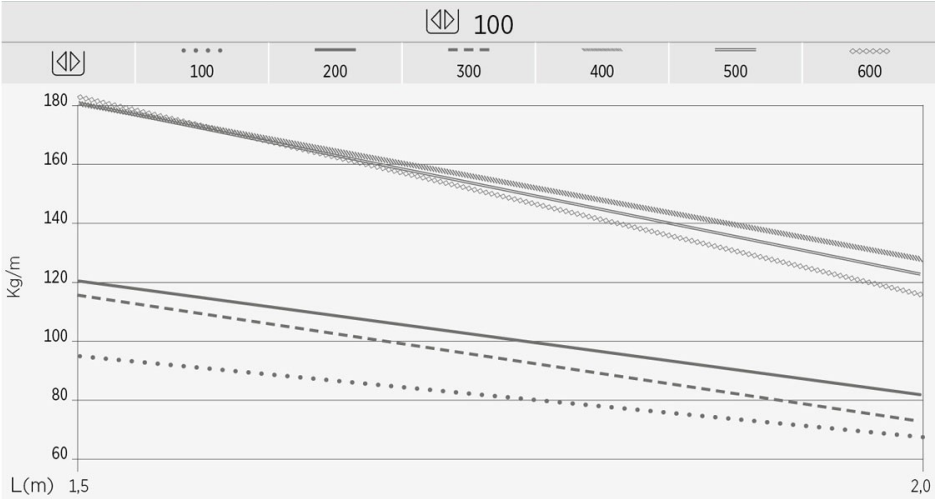

Product applications

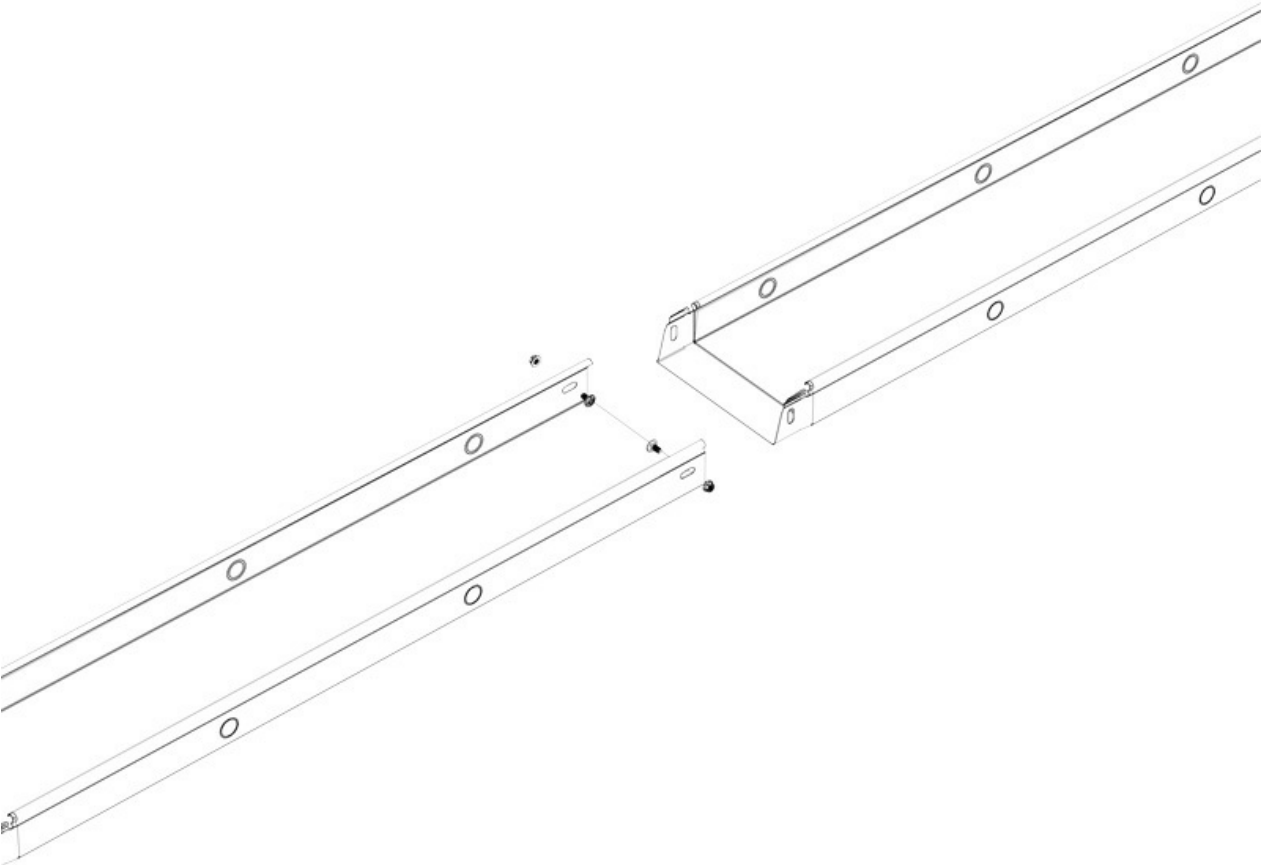

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

