
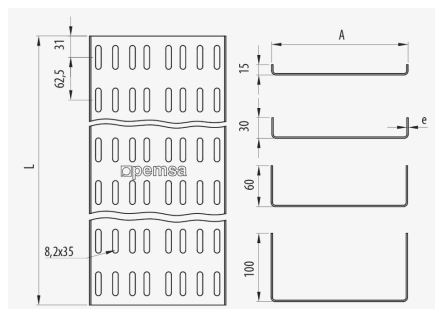


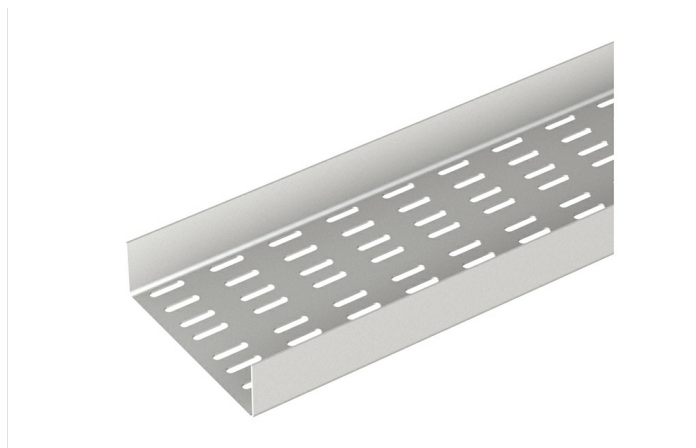

Description

Pemsaband® PQU perforated and reinforced sheet metal tray of 15, 30, 50 and 60 mm in height and widths of 100 to 600 mm, thicknesses of 2 and 2.5 mm and two lengths, of 2 and 3 metres. Suitable for the support and management of cables with high loads in industrial applications. Pemsaband® PQ trays are approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick, suitable for outdoor installations and aggressive environments.

Advantages

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Pemsaband® PQU has a wide range of accessories.

Designed to withstand high loads thanks to its configuration and variety of thicknesses.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil Works and Infrastructure installations. Also used in tunnels and installation galleries, due to its capacity to withstand high loads.

Solutions



OFFSHORE, PORTS



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics					
 GC	 Class 8	 15, 30, 50, 60	 100, 150, 200, 300, 50, 400, 500, 600	 Steel with surface coating	 20 J
 2	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC000047		

Product data					
			Ref	kg/u	
15	100	3	76603010	1,770	3
15	150	3	76603015	2,470	3
15	200	3	76603020	3,170	3
15	300	3	76603030	4,860	3
30	50	3	76603105	1,570	3
30	100	3	76603110	2,290	3
30	150	3	76603115	2,980	3
30	200	3	76603120	3,680	3
30	300	3	76603130	5,370	3
30	400	3	76603140	7,140	3
30	500	3	76603150	8,750	3
30	600	3	76603160	10,400	3
50	50	3	76603205	2,250	3
60	100	3	76603210	3,310	3
60	150	3	76603215	4,000	3
60	200	3	76603220	4,690	3
60	300	3	76603230	6,390	3
60	400	3	76603240	8,150	3
60	500	3	76603250	9,770	3
60	600	3	76603260	11,400	3
15	50	2	76623005	1,060	2

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials	
PC+ABS - Halogen Free Polycarbonate + ABS	
	www.pemsa-rejiband.com Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



PEMSAband PQU

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

