
Pemsaband PQU AL

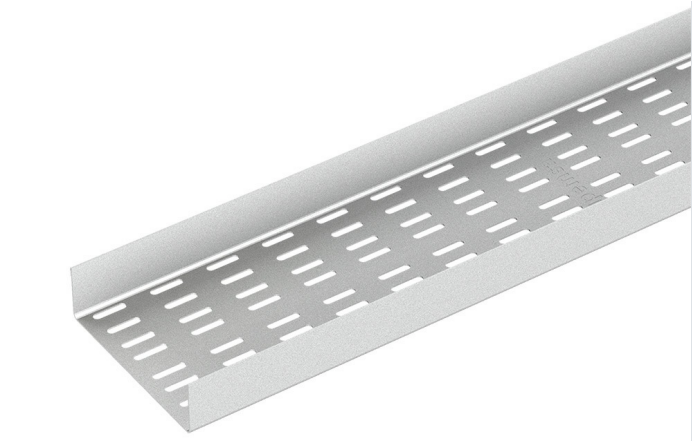

Description

Pemsaband® PQ AL reinforced perforated sheet metal tray. Designed to withstand high loads in industrial and aggressive environments. Made from Aluminium alloy 1050H24.

Advantages

Multiple perforations that improve the fixation of the cables.

Reinforced design to support large cable loads, but at the same time, it is light and easy to install due to the low density of aluminum compared to other metallic materials.

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Pemsaband PQU AL

Main technical characteristics

AL | 30, 60, 50 | 100, 200, 300, 400, 600, 50 | 3 | 3 | Aluminum | 20 J | -50 / 150 °C

A1 No combustible | ETIM 10 EC000047

Product data

		REF	kg/u	e(mm)
30	100	82000061	0,902	2.5
30	200	82000062	1,450	2.5
30	300	82000063	2,130	2.5
30	400	82000064	2,830	2.5
30	600	82000065	4,120	2.5
60	100	82000066	1,310	2.5
60	200	82000067	1,860	2.5
60	300	82000068	2,530	2.5
60	400	82000069	3,240	2.5
60	600	82000070	4,530	2.5
50	50	82000072	0,886	2.5
50	50	82003217	0,531	1.5
30	100	82003218	0,548	1.5
60	100	82003219	0,791	1.5
30	50	82003350	0,616	2.5

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."