


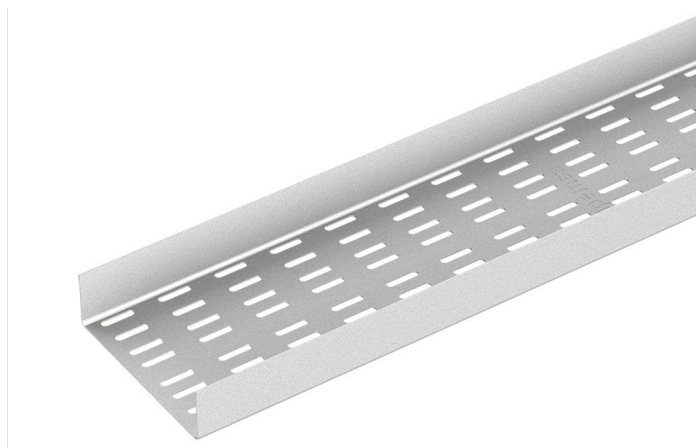

Description

Pemsaband® PQ AL reinforced perforated sheet metal tray. Of 30 mm height, Width 300 mm, With AL protection system. Designed to withstand high loads in industrial and aggressive environments. Made from Aluminium alloy 1050H24.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Reinforced design to support large cable loads, but at the same time, it is light and easy to install due to the low density of aluminum compared to other metallic materials.

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Multiple perforations that improve the fixation of the cables.

Applications

Adecuada para instalaciones de canalización de cableado en Industria Oil&Gas, Petroquímica, Plataformas Offshore, Puertos y aplicaciones marítimas en general, Proyectos industriales en entornos agresivos y con alta corrosión en costa y borde del mar, Centrales de Energía, Eléctricas, y Energías Renovables.

Solutions



Protection System	AL	u	3
Finish	1050H24 Aluminium	Material	Aluminum
Flange (mm)	30	Impact Strength (J)	20 J
Width (mm)	300	Thickness (mm)	2.5
Length (m)	3	Working temperature range (°C)	-50 / 150 °C
kg/u	2.130	Fire resistance	A1 No combustible

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

□