


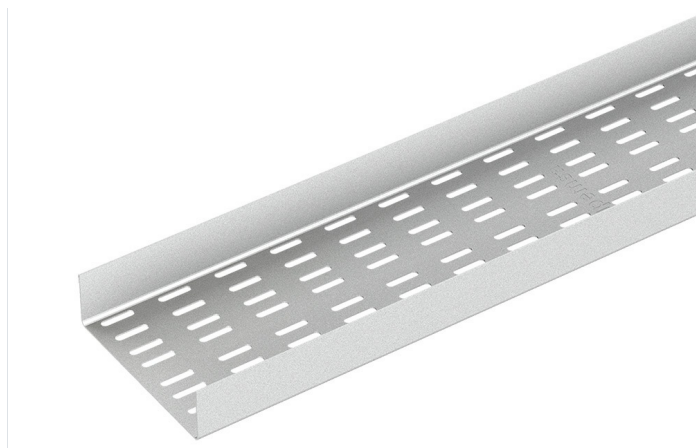

Description

Pemsaband® PQ AL reinforced perforated sheet metal tray. Of 60 mm height, Width 300 mm, With AL protection system. Designed to withstand high loads in industrial and aggressive environments. Made from Aluminium alloy 1050H24.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Reinforced design to support large cable loads, but at the same time, it is light and easy to install due to the low density of aluminum compared to other metallic materials.

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Multiple perforations that improve the fixation of the cables.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Product data			
ETIM 10		EC000047	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		AL	
Finish		1050H24 Aluminium	
Flange (mm)		60	
Width (mm)		300	
Length (m)		3	
kg/u		2,530	
u		3	
Material		Aluminum	
Impact Strength (J)		20 J	
Thickness (mm)		2.5	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

