


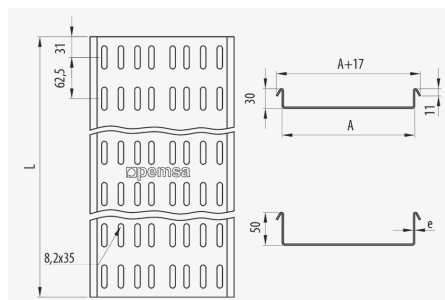

Description

Pemsaband® PQU perforated and reinforced sheet metal tray of 15, 30, 50 and 60 mm in height and widths of 100 to 600 mm, thicknesses of 2 and 2.5 mm and two lengths, of 2 and 3 metres. Of 50 mm height, Width 300 mm, With 2 mm thickness. Wrap-around format as safety edge for cable protection. Suitable for the support and conduction of cables with high loads in industrial applications. The Pemsaband® PQW trays are approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick, suitable for outdoor installations and aggressive environments.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Designed to withstand high loads thanks to its configuration and variety of thicknesses.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Pemsaband® PQW has a wide range of accessories.

Applications

Used for the management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil Works and Infrastructure installations. Also used in tunnels and installation galleries, due to its capacity to withstand high loads.

Solutions



OFFSHORE, PORTS



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



ETIM 10	EC000047
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	50,194
Protection System	GC
Finish	HDG, Hot Dip Galvanised
Resistance Class	Class 8
Flange (mm)	50
Width (mm)	300
Length (m)	3
kg/u	6,460

u	3
Material	Steel with surface coating
Impact Strength (J)	20 J
Thickness (mm)	2
Working temperature range (°C)	-50 / 150 °C
Fire resistance	A1 No combustible

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester


TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

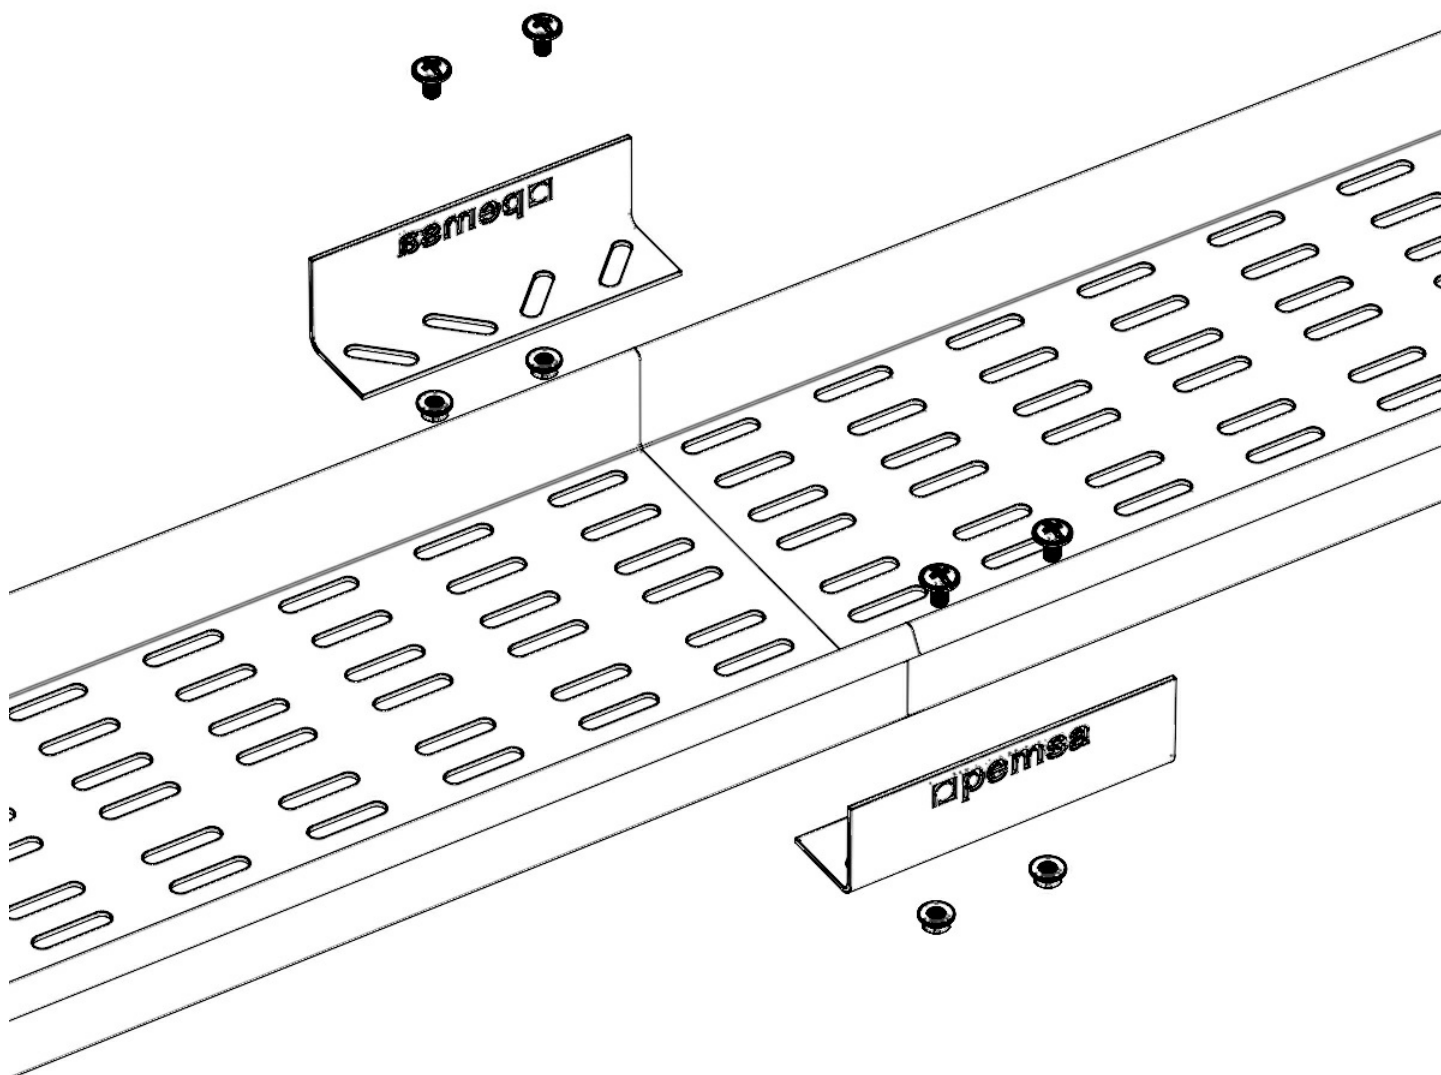

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."