
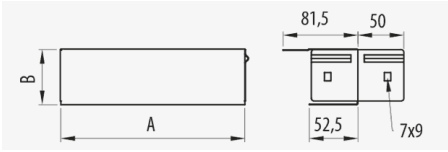


Reducer PEMSAband (Ref: 71031030)

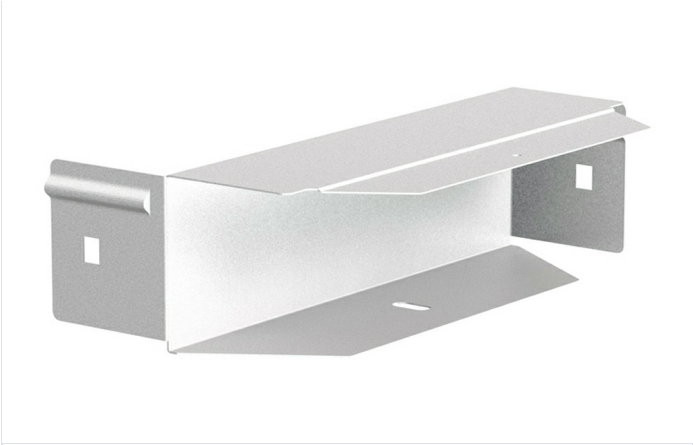

Description

Width 300 mm, With GC protection system, HDG finish

Advantages

Applications

Solutions



Product data

ETIM 10	EC001574	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,869	Material	Steel with surface coating
Protection System	GC	IP	IP44
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 5	Fire resistance	A1 No combustible
Flange (mm)	35		
Width (mm)	300		
kg/u	0,335		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Product applications

