
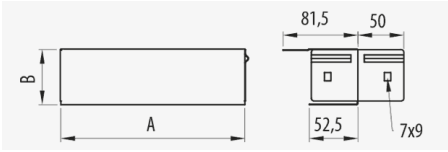


Reducer PEMSAband (Ref: 71034010)

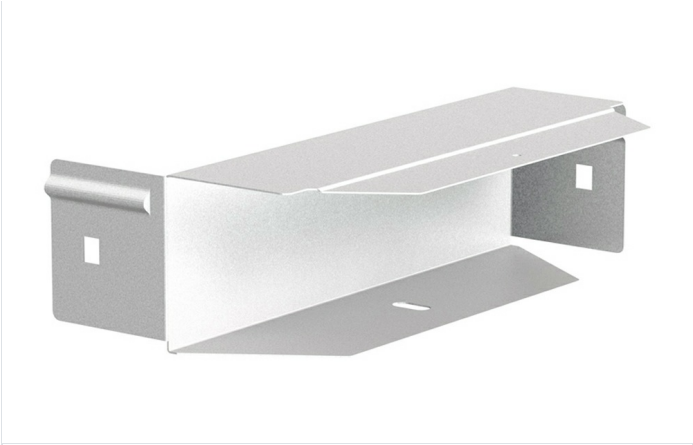

Description

Width 100 mm, With GC protection system, HDG finish

Advantages

Applications

Solutions



Product data			
Protection System	GC	u	1
Finish	HDG, Hot Dip Galvanised	Material	Steel with surface coating
Resistance Class	Class 5	IP	IP44
Flange (mm)	100	Working temperature range (°C)	-50 / 150 °C
Width (mm)	100	Fire resistance	A1 No combustible
kg/u	0.175		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

