
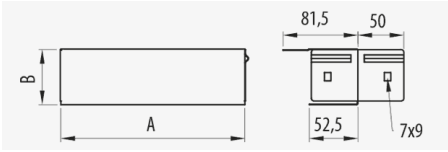


Reducer PEMSAband (Ref: 71034020)

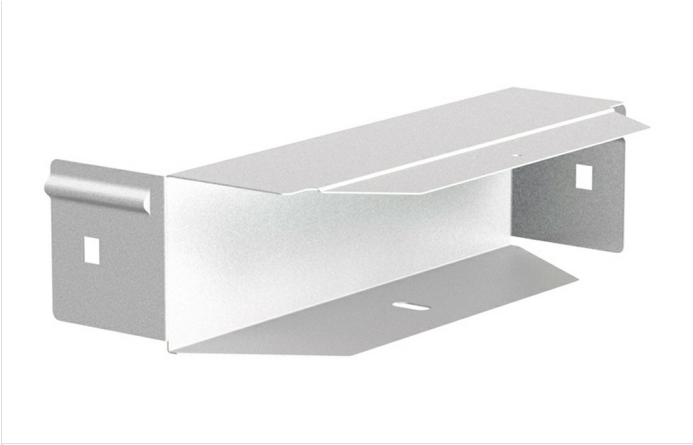

Description

Width 200 mm, With GC protection system, HDG finish

Advantages

Applications

Solutions



Product data			
ETIM 10		EC001574	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,897	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 5	
Flange (mm)		100	
Width (mm)		200	
kg/u		0,346	
u		1	
Material		Steel with surface coating	
IP		IP44	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

