
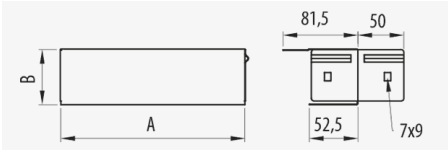


Reducer **PEMSA**band (Ref: 71034030)

1/6

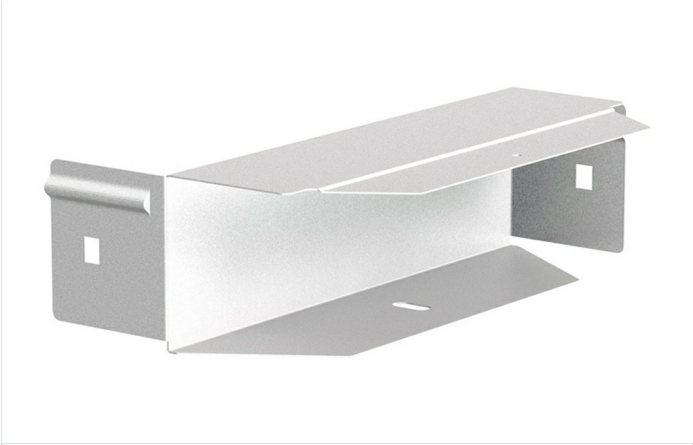

Description
Width 300 mm, With GC protection system, HDG finish
Advantages
Applications
Solutions

Product data

ETIM 10	EC001574	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,28	Material	Steel with surface coating
Protection System	GC	IP	IP44
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 5	Fire resistance	A1 No combustible
Flange (mm)	100		
Width (mm)	300		
kg/u	0,494		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

