
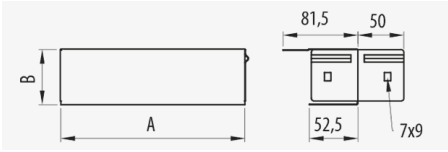


Reducer **PEMSA**band (Ref: 71034040)

1/6

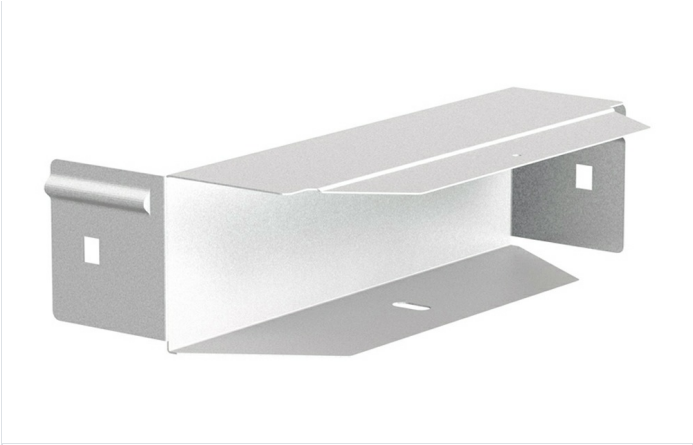

Description
Width 400 mm, With GC protection system, HDG finish
Advantages
Applications
Solutions

Product data			
ETIM 10	EC001574	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,658	Material	Steel with surface coating
Protection System	GC	IP	IP44
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 5	Fire resistance	A1 No combustible
Flange (mm)	100		
Width (mm)	400		
kg/u	0,640		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

