
PEMSAband Universal Bracket



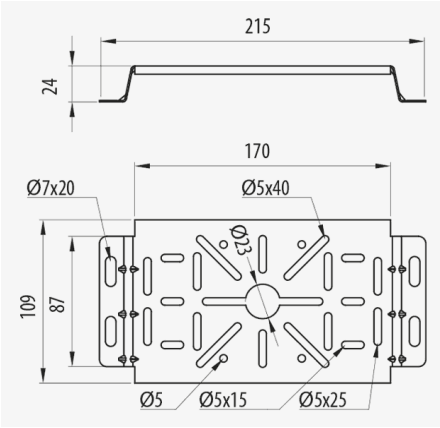

Description

Metal support for the installation of boxes, luminaires or other devices to the Pemsaband® and Inducanal® tray. It also allows for the wall support of light loads in Pemsaband® and Inducanal® trays of widths 60, 100 and 150. Manufactured in steel and available in various Protection Systems.

Advantages

For mounting on tray use the Pemsaband M6 Connection Kit.

Quick and easy installation.

Thanks to its design it allows the placing of accessories in various positions.

Allows wall mounting of all types of trays of intermediate widths and not very high loads.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Applications

Suitable for the installation of boxes or other devices on the Pemsaband® and Inducanal® trays and for the support of light loads on the wall, in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications. Compatible with the range of Megaband® ladder for use as a device holder.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PEMSAband Universal Bracket

Main technical characteristics

10 | Steel with surface coating | -50 / 150 °C | A1 No combustible | ETIM 10 EC001004

Product data

Ⓢ	Class IEC 61537	REF	kg/u
PG	Class 3	70420911	0,184
GC	Class 8	70430911	0,196

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene


NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product applications

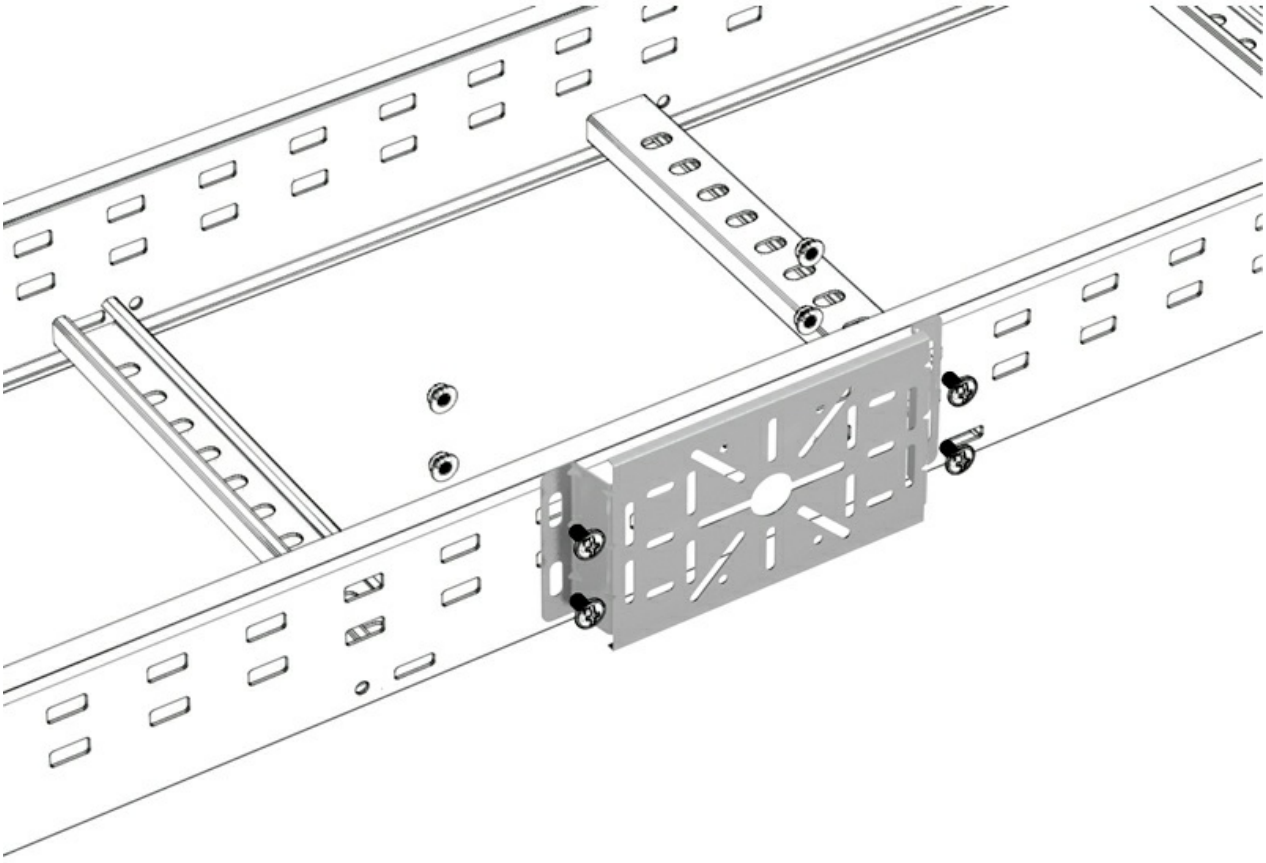

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PEMSAband Universal Bracket

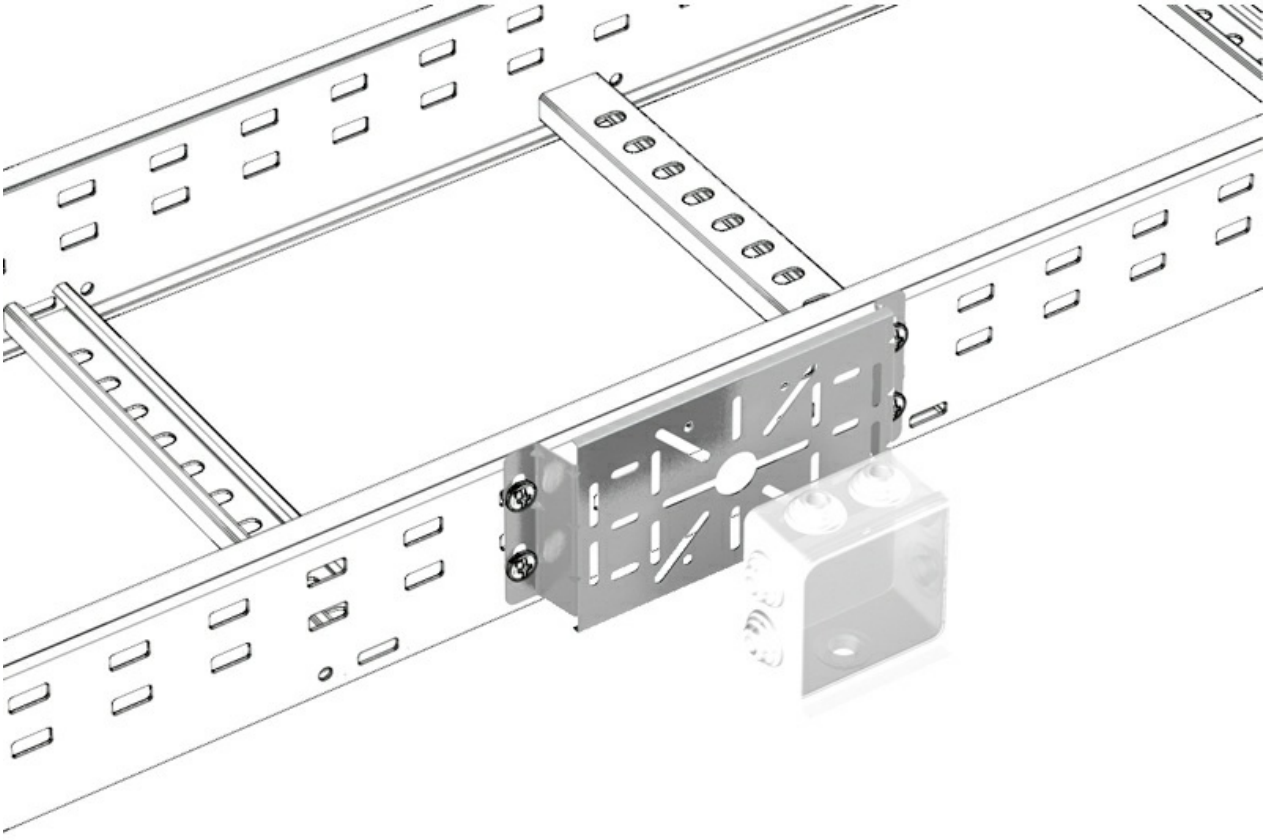

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."