
Assembly Accessories

30/10/2026



# PEMSAband Inside Hanging Plate ( Ref: 70122220 )



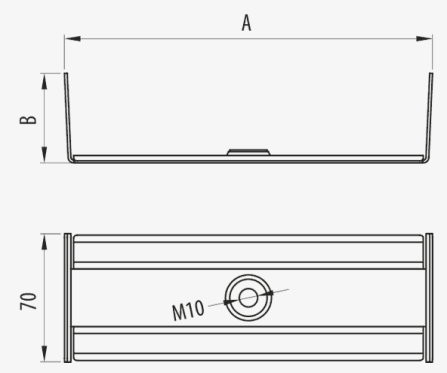


## Description

Inside Suspension for Pemsaband® tray. Width 200 mm, With PG protection system. M10 threaded rod fixing that is concealed inside the tray. Attachthe rod to the tray by means of an integrated thread. Available in different sizes and Protection Systems.

## Advantages

Available in widths from 100 to 400 mm and in different protection systems: PG and GC

The support is concealed inside the tray giving an aesthetic appearance of the trays.

Easy and quick to install.

To connect the suspension to the tray, use the Pemsaband® M6 Joining Kit.

For ceiling mounting with M10 rods. No need for any additional nuts as the plate has an integrated thread.

## Applications

Recommended for ceiling installation of Pemsaband® trays, concealing the suspension inside the tray. Suitable for the management of cables in electrical and telecommunications installations in public buildings, commercial centres or other buildings with a highly aesthetic component.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# PEMSAband Inside Hanging Plate ( Ref: 70122220 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001003 | **u** | 10 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 0,798 | **Material** | Steel with surface coating |
| **Protection System** | PG | **SWL (kg)** | 27 |
| **Finish** | PG3, Pregalvanised | **Working temperature range (°C)** | -50 / 150 °C |
| **Resistance Class** | Class 3 | **Fire resistance** | A1 No combustible |
| **Flange (mm)** | 60 | | |
| **Width (mm)** | 200 | | |
| **kg/u** | 0,247 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# PEMSAband Inside Hanging Plate ( Ref: 70122220 )

## Product applications



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."