


PEMSA^{band} Inside Hanging Plate (Ref: 70122240)

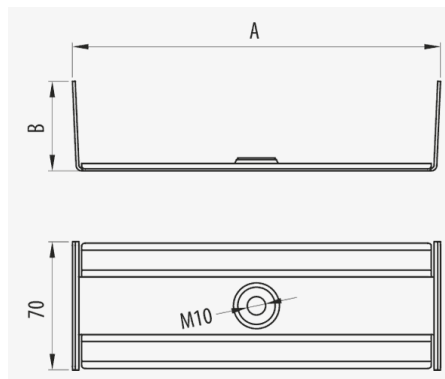

Description

Inside Suspension for Pemsaband® tray. Width 400 mm, With PG protection system. M10 threaded rod fixing that is concealed inside the tray. Attach the rod to the tray by means of an integrated thread. Available in different sizes and Protection Systems.

Advantages

Available in widths from 100 to 400 mm and in different protection systems: PG and GC

The support is concealed inside the tray giving an aesthetic appearance of the trays.

Easy and quick to install.

To connect the suspension to the tray, use the Pemsaband® M6 Joining Kit.

For ceiling mounting with M10 rods. No need for any additional nuts as the plate has an integrated thread.

Applications

Recommended for ceiling installation of Pemsaband® trays, concealing the suspension inside the tray. Suitable for the management of cables in electrical and telecommunications installations in public buildings, commercial centres or other buildings with a highly aesthetic component.

Solutions



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1,348	
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
Flange (mm)		60	
Width (mm)		400	
kg/u		0,417	
u		10	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

PEMSA**band** Inside Hanging Plate (Ref: 70122240)

3/3

Product applications

□ □ □ □ □ □